







FINISHED SIZE | 20" x 14"

## FABRIC REQUIREMENTS

Fabric <b>A</b>	DEN-S-2008	¼ yd.
Fabric <b>B</b>	FUS-W-604	¾ yd.
Fabric <b>C</b>	DEN-L-4000	1/6 yd.
Fabric <b>D</b>	FUS-W-606	1/8 yd.
Fabric <b>E</b>	PE-426	1/8 yd.
Fabric <b>F</b>	PE-413	1/8 yd.
Fabric <b>G</b>	PE-461	1/8 yd.

**BACKING FABRIC**  
FUS-W-604 (included)

Additional Materials:

Steam-A-Seam 2 Double Stick Fusible Tape

## CUTTING DIRECTIONS

¼" seam allowances are included.  
WOF means width of fabric.

- Two (2) rectangles of 10 ½" x 7 ½" from Fabric **A**
- Two (2) rectangles of 10 ½" x 7 ½" from Fabric **B**
- Two (2) perfect squares of 5 ½" from Fabric **C**
- Two (2) perfect squares of 3 ½" from Fabric **C**
- Two (2) perfect squares of 3 ½" from Fabric **D**
- Two (2) strips of 1" x 5 ½" from Fabric **A**
- Two (2) strips of 1" x 5" from Fabric **A**
- Two (2) strips of 1" x 5" from Fabric **E**
- Two (2) strips of 1" x 4 ½" from Fabric **E**
- Two (2) strips of 1" x 4 ½" from Fabric **F**
- Two (2) strips of 1" x 4" from Fabric **F**
- Two (2) strips of 1" x 4" from Fabric **G**
- Two (2) strips of 1" x 3 ½" from Fabric **G**

## CONSTRUCTION

Sew all rights sides together with ¼" seam allowance.

- Start by pairing a 10 ½" x 7 ½" rectangle from Fabric **A** with an 10 ½" x 7 ½" rectangle from Fabric **B**.
- Repeat same process but change the order by pairing Fabric **B** with Fabric **A**
- Now, sew the 2 rectangle pieces together as diagram below.

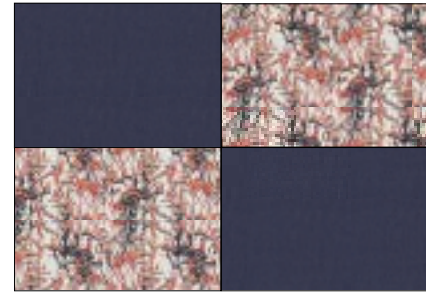


DIAGRAM 1

- Now, follow the diagram below to complete the 3 ½" perfect square from Fabric **C** with the strips from Fabric **G, F, E, A**

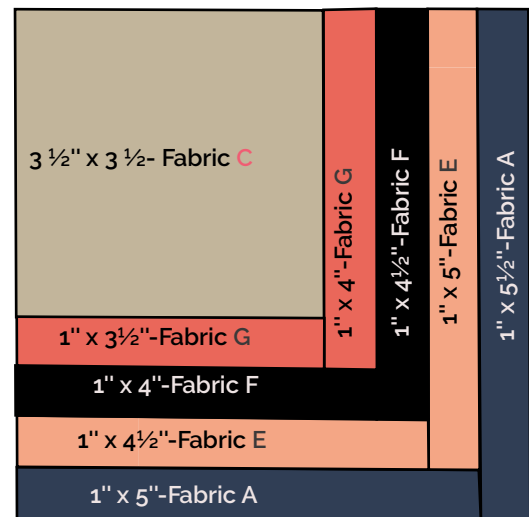


DIAGRAM 2

- Repeat the same process for the other 3 ½" perfect square and the rest of the strips.
- Now, take the 5 ½" perfect square from Fabric **C** and pair it with an 3 ½" perfect square from Fabric **D**.
- Before sewing, make sure you place in between the pieces, the Steam a Seam Fusible Tape.
- Pin the Fabric **D** square to the lower right side of the Fabric **C** square as diagram below




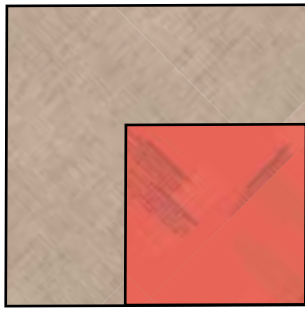


DIAGRAM 3

- Repeat the same process for the other 5½" perfect square from Fabric C but pin the Fabric D square to the upper left side of the Fabric C square.
- You will do a decorative top stitch of the remaining unsewed portion of Fabric D square bot both pieces.



- Now take the block and pair it with the stripe block as diagram below, and sew.

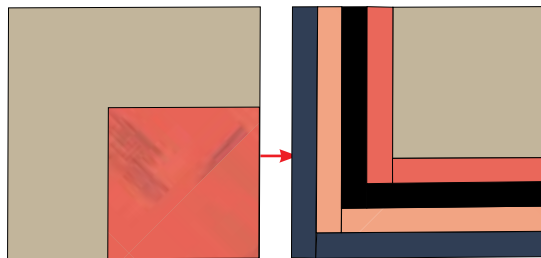


DIAGRAM 4

- Repeat same process by switching the order

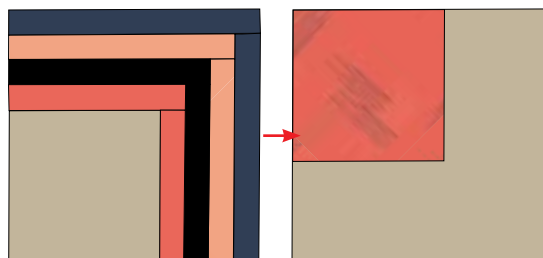


DIAGRAM 5

- Now, pair both pieces together and then you will rotate it in a angle of 45° degrees.
- Place if on top of the first piece assembled and top stitch around the edges

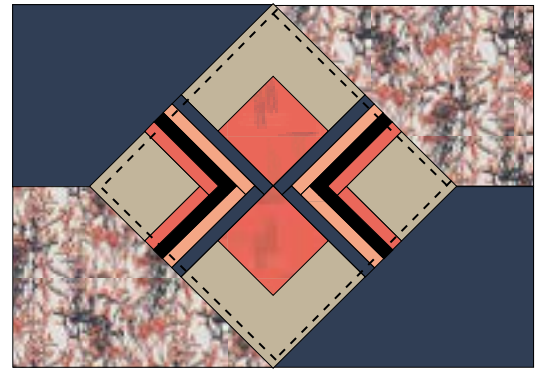


DIAGRAM 6

- Quilt as desired.

## CREATING THE BACK PILLOW

*Sew all rights sides together with ¼" seam allowance. Press open.*

- To make a envelope back for your pillow take both 16' x 15' rectangles and fold one 16' side on each rectangle in 1/2' and press and then fold another 1/2' and press.
- Top stitch as close to the edge as possible.
- Place rectangles right side together on top of each other to the front of your pillow and stitch all the way around your pillow at ¼' seam allowance.
- Clip corners at seam allowance and flip piece to the right side of the fabric.
- Fill pillow with a 20' x 14' pillow form and enjoy!

