

Buckle Up

DESIGNED BY AGFstudio



FABRICS DESIGNED BY DANA WILLARD



DAT-99402
GRAZING GOATS

ADDITIONAL BLENDERS FOR THIS PROJECT



PE-432
SANDSTONE



PE-422
CHOCOLATE



Buckle Up

FINISHED SIZE | 11½" x 13½" x 6"

FABRIC REQUIREMENTS

Fabric **A** DAT-99402 ½ yd.
 Fabric **B** PE-432 ⅝ yd.
 Fabric **C** PE-422 ¼ yd.

LINING FABRIC

Fabric **B** PE-432 ½ yds. (*Suggested*)

ADDITIONAL MATERIAL

- Kraftex (dark brown)
- Three (3) belt buckles
- Velcro

CUTTING DIRECTIONS

¼" seam allowances are included.
 WOF means width of fabric.

- One (1) 36" x 14" rectangle from fabric **A**.
- One (1) 36" x 14" rectangle from fabric **B**.
- Two (2) 5⅛" x 4¾" squares from fabric **B**.
- Two (2) 5⅛" x 2⅛" rectangles from fabric **B**.
- Two (2) Top Flap templates from fabric **C**.
- Four (4) 20" x 1¼" strips from Kraftex (Back straps).
- Two (2) 12" x 1¼" strips from Kraftex (Front strap).
- Two (2) 7" x 1¼" strips from Kraftex (Front bottom strap).
- Four (4) 9" x 1¼" strips from Kraftex (Back bottom strap).
- One (1) 11½" x 6½" rectangle from Kraftex.

CONSTRUCTION

Sew all rights sides together with ¼" seam allowance.

INVERTED BOX STITCH POCKET

- Before creating the inverted box pleat pocket, quilt both 5⅛" x 4¾" squares from fabric **B** as desired.
- Now, mark out the pleat with a water soluble pen:




DIAGRAM 1

- Next, press the pocket fabric at the fold. When folded, the marked lines will stack on top of each other.
- From the top, sew about 1½" down at where the lines are marked and from the bottom, sew about 1½" up.

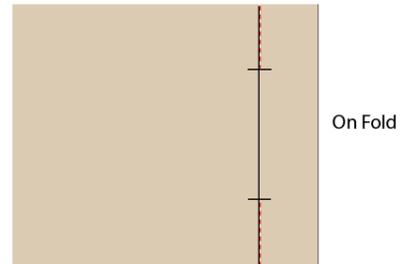


DIAGRAM 2

- The pocket fabric should look like this after the above steps.



DIAGRAM 3

- Press the pleat down such that it is spread evenly down the middle.




DIAGRAM 4

- Serge or use zigzag stitches around all edges of the pocket.
- Press the pocket hem and sew using straight stitch along the hem.
- Then, press the other edges of the pockets in, add a small binding, and top stitch around the pockets.
- And your inverted pleat pocket is done.




DIAGRAM 5

- For the pockets placement, measure about 6" from the edges to the center of the main fabric **A** and 1½" from the bottom up. That will be your pockets placement.

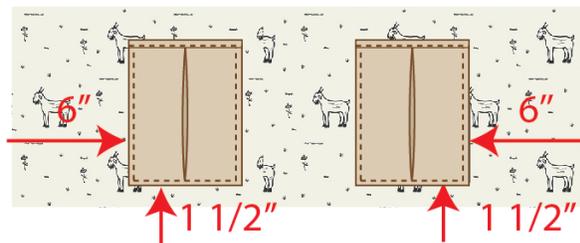


DIAGRAM 6

- For the pocket flap from fabric **B** measure about 1½" from the bottom up in order to sew the velcro piece.
- Place the velcro, wrong side facing down.
- Sew the edges of the velcro and sew a small X.
- Repeat the same for the other pocket flap.



DIAGRAM 7

- Measure and mark about ½" up from the pocket in order to sew the pocket flap
- Place the pocket flap facing the velcro up and sew at the edge of the flap.
- Fold the flap down, press and steam on the edge.
- Repeat the same procedure for the other pocket

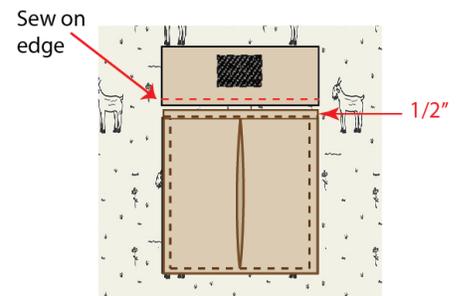


DIAGRAM 8

- Now, take your main fabric, already with your pockets attached and fold it right sides facing and stitch on the edge.
- Set aside




DIAGRAM 9




DIAGRAM 14

- Now, take the 12" strap and place it at ½" from each side of the pointed edge strap
- Pin both pieces
- Take your main piece and place right side facing up, the ends of the two 20" straps and your flap pinned with the strap pieces facing down, laying on the back side of the main piece as diagram below


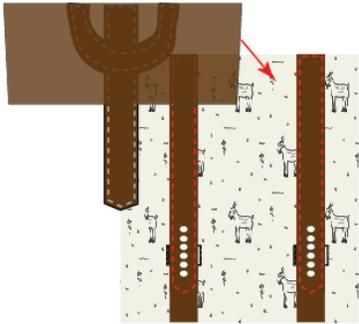


DIAGRAM 15

Sewing the Lining to the Exterior

- Place exterior of bag inside lining making sure right sides are touching.
- Pin lining to the exterior of the bag and sew all the way around the top of your bag at ½" seam allowance.
- Pull exterior of bag through the unsewn portion in the lining. Handstitch or machine stitch unsewn portion closed.
- Once assembled all the pieces, cover the rough edges by placing a binding of desired color fabric.
- For your final step, you have the option to do a top stitch of the front strap with the flap so its more secured.
- Just top stitch a small 1" x ¾" square and an X in the middle buckle closed and your done!

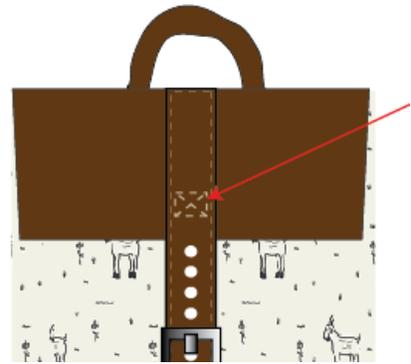


DIAGRAM 16

