









FABRICS DESIGNED BY BONNIE CHRISTINE



TOR-13860 FIELDS OF ALSIKE



TOR-13861 TERRAIN OVERLOOK



TOR-13862 ROADSIDE WILDFLOWERS



TOR-13864 DISCOVERED WARMTH



TOR-13865 BACKROADS UMBER



TOR-13866




TOR-13868 NATURE WALK YELLOWSTONE



TOR-13869 WANDERING WITH DOE



TOR-23860 FIELDS OF GOLDENROD




TOR-23861 TERRAIN UNMARKED



TOR-23863



TOR-23864 DISCOVERED SUNSHINE




TOR-23865 ACKROADS MOSS



TOR-23867 WHISPER WEALD



TOR-23868 NATURE WALK LIMESTONE



TOR-23869 WANDERING WITH BEAR









FINISHED SIZE | 24"x 32%"

FABRIC REQUIREMENTS

Fabric A TOR-23863 Fabric B PE-436 ‰yd ½yd

BACKING FABRIC
DEN-L-4000- 34yd (Suggested)

CUTTING DIRECTION

Sew all rights sides together with 1/4" seam allowance.

- Four (4) 10" x 10" squares from Fabrics A, B
- One (1) 24 $\frac{1}{2}$ " x 3 $\frac{1}{4}$ " rectangle from Fabric A
- Two (2) 24 $\frac{1}{2}$ " x 3 $\frac{1}{2}$ " rectangles from Fabric A

CONSTRUCTION

Sew all rights sides together with $\frac{1}{4}$ " seam allowance.

- Start by taking fabric A and B 10" x 10" squares, right sides facing
- Stitch all edges at a 1/4" seam
- Then, cut as diagram below



DIAGRAM 1




- Arrange the HSTs into an hourglass block and sew together.
- Press, trim if necessary
- The block should measure 12 3/4" square.
- Repeat the same process three more times, so you have a total of four (4) blocks.




DIAGRAM 2

- Divide the total size of the block by 3, that will be the measurement to start cutting your block, which will be 4 ¼" x 4¼"
- That should be your start, from your left edge in.
- Trace and cut





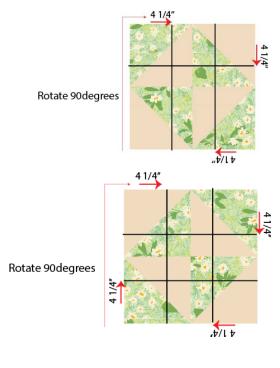

You should have a total of nine (9) small blocks measuring 4 1/4



DIAGRAM 3

- Now, take the middle top block and the left middle block and swap them as diagram below.
- Repeat the same with the middle right and middle bottom block.
- You should have a a block looking like diagram below.
- Sew each piece together
- Repeat the same process for the other three (3) pieces.

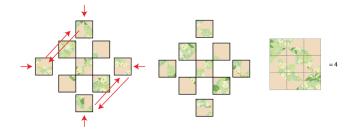


DIAGRAM 4

Now, take two blocks and rotate one 90 degrees

(mirror effect) and sew them together.



DIAGRAM 5

 Repeat the same process for the other two blocks but rotate them 180 degrees as diagram below:



DIAGRAM 6

• Now take your 24 ½" x 3 ¼" rectangle and your two (2) 24 ½" x 3 ½" rectangles from Fabric A and follow diagram below for each row assembly and trim excess fabric if needed




DIAGRAM 7



Sew all rights sides together with $\frac{1}{4}$ seam allowance. Press open.

- To make a envelope back for your rug take your backing fabric and place it right sides together with your top rug.
- \bullet Place in between your top and bottom rug your % " Chenille-It leaving half in.
- Stitch the edges leaving a small opening.
- Clip corners at seam allowance and flip piece to the right side of the fabric.
- Place the rest of your %" Chenille-It
- Follow instructions for the Chenille-It, and enjoy your new rug!

