

Composition

FINISHED SIZE | 60" x 72"

FABRIC REQUIREMENTS

Fabric A	CAP-RV-8009	1 $\frac{3}{8}$ yd.
Fabric B	CAP-RV-8005	1 $\frac{1}{8}$ yd.
Fabric C	PE-413	1 $\frac{1}{2}$ yd.
Fabric D	PE-430	$\frac{3}{4}$ yd.
Fabric E	PE-410	$\frac{3}{4}$ yd.
Fabric F	PE-408	$\frac{5}{8}$ yd.

BACKING FABRIC

CAP-RV-8009 4 $\frac{1}{2}$ yds. (*Suggested*)

BINDING FABRIC

PE-413 (Fabric **C**) (*Included*)

CUTTING DIRECTIONS

$\frac{1}{4}$ " seam allowances are included.
WOF means width of fabric.

- Thirty five (35) templates 1 from fabric **A**.
- Twenty eight (28) templates 1 from fabric **B**.
- Twenty (20) templates 1 from fabric **C**.
- Thirty one (31) templates 2 from fabric **C**.
- Fifteen (15) templates 1 from fabric **D**.
- Five (5) templates 2 from fabric **D**.
- Seventeen (17) templates 1 from fabric **E**.
- Ten (10) templates 2 from fabric **E**.
- Eleven (11) templates 1 from fabric **F**.
- Ten (10) templates 2 from fabric **F**.

CONSTRUCTION

Sew all rights sides together with $\frac{1}{4}$ " seam allowance.

- Referring to the cover picture arrange triangles into nine rows, with fourteen triangles in each row.
- Alternate the direction of each triangle's tip, beginning with the first triangle pointing down.

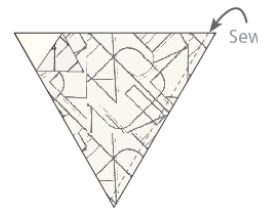


DIAGRAM 1

- Take all of your templates 1 cutout and assemble each row following the diagram below.

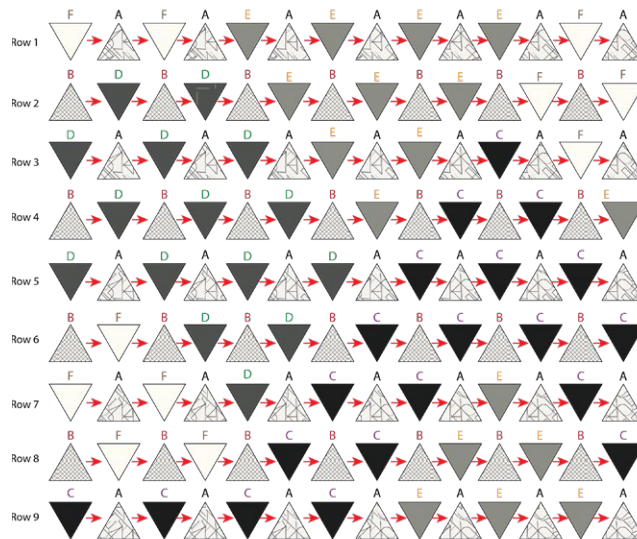


DIAGRAM 2

ASSEMBLING THE TOP

Sew all rights sides together with ¼" seam allowance. Press open.

- Join rows 1-9.

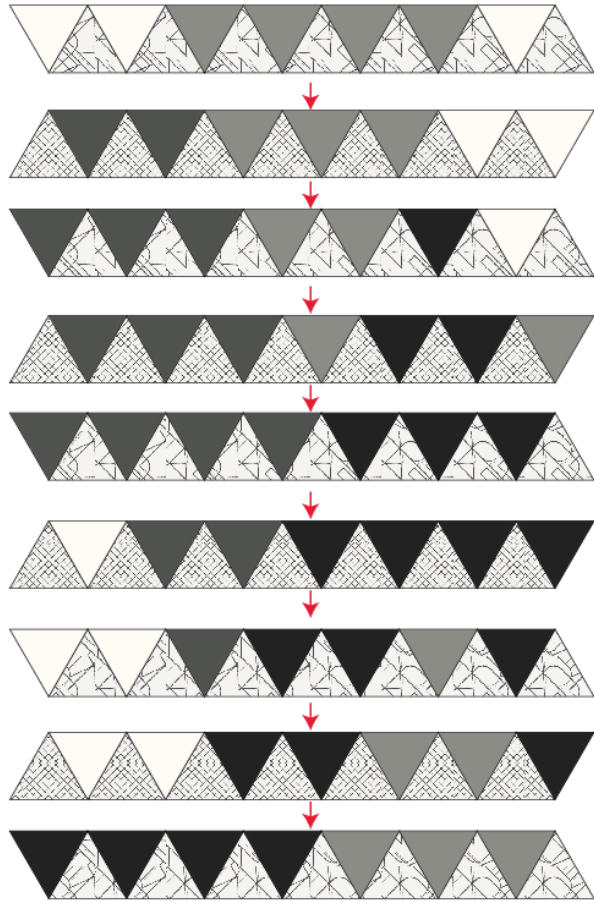


DIAGRAM 3

- For this next step, place double side fusible tape on the wrong side of template 2 pieces from fabrics **C**, **D**, **E** and **F**.
- Take all of your circle pieces from fabrics **C**, **D**, **E** and **F** and follow diagram 4 for each fabric placement.

- Top stitch the edges of the fabric circles with straight stitch or zig zag stitch.

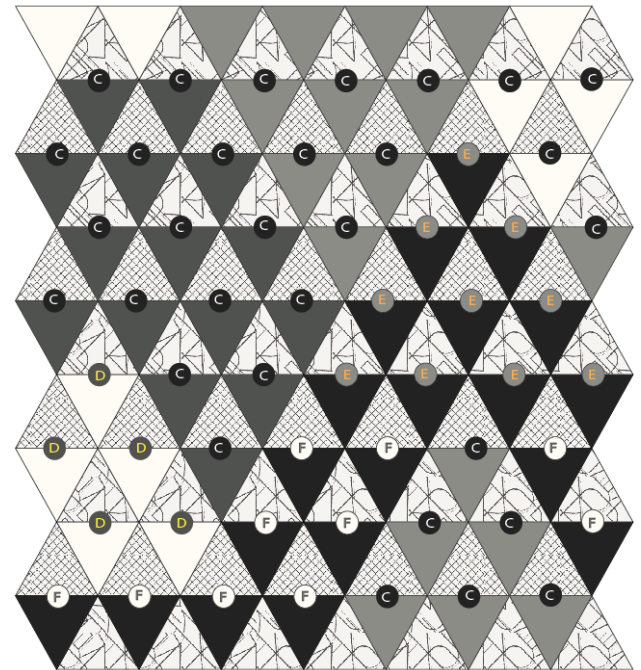


DIAGRAM 4

- Trim your quilt top to 60½" x 72½".

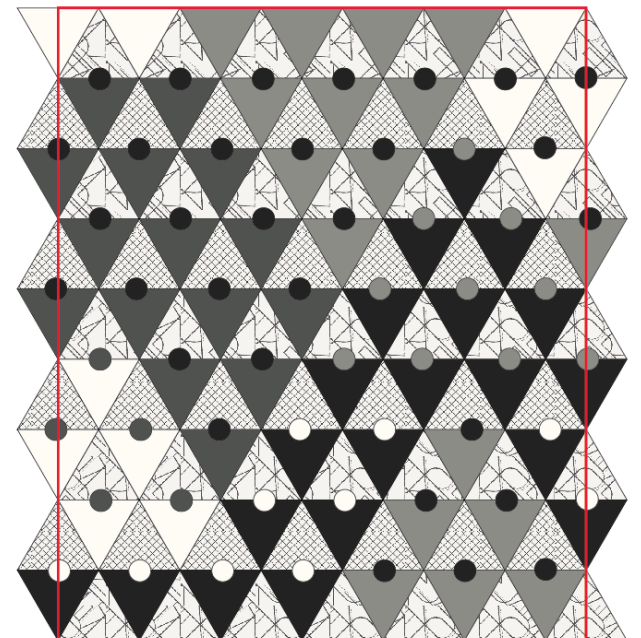


DIAGRAM 5

