

Moments

FINISHED SIZE | 24" x 16"

FABRIC REQUIREMENTS

Fabric A	FUS-BL-1800	¾ yd.
Fabric B	CAP-SV-11600	¼ yd.
Fabric C	CAP-SV-11601	¼ yd.
Fabric D	CAP-SV-11606	¼ yd.
Fabric E	DEN-L-4000	¼ yd.
Fabric F	DEN-S-2006	¼ yd.

BACKING FABRIC
FUS-BL-1800 (Included)

CUTTING DIRECTIONS

¼" seam allowances are included.
WOF means width of fabric.

Fabric **A**

- Eight (8) 16½" x 1½" strips.
- Two (2) 17½" x 16½" rectangles.

Fabric **B**

- Four (4) 4½" squares.
- Two (2) 16½" x 1½" strips.

Fabric **C**

- Two (2) 1½" x WOF strips.
- Two (2) 2½" x WOF strips.

Fabric **D**

- Two (2) 1½" x WOF strips.

Fabric **E**

- Two (2) 1½" x WOF strips.
- Sixteen (16) 2½" squares.

Fabric **F**

- Two (2) 1½" x WOF strips.
- Two (2) 16½" x 1½" strips.

CONSTRUCTION

Sew all rights sides together with ¼" seam allowance.

Center Blocks:

- Start by placing one (1) 2½" square from fabric **E** at the top left corner of a 4½" square from fabric **B**.
- Sew diagonally, trim ¼" away from seam allowance and press open.
- Place another 2½" square from fabric **E** to the top right corner of the same 4½" square from fabric **B**, sew diagonally, trim ¼" away from seam allowance and press open.
- Keep repeating the same steps with the other two (2) 2½" squares from fabric **E** at the two bottom corners of the 4½" square from fabric **B**.

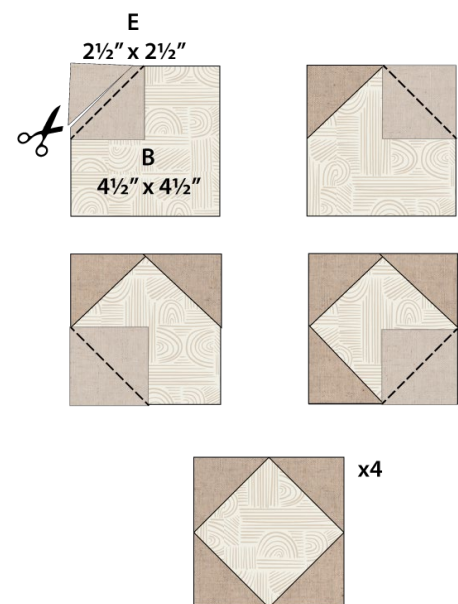


DIAGRAM 1

