

# Sparkle

dress

Art Gallery  
FABRICS

WILD

& free  
by Maureen  
Caskwell



## MATERIALS

» 3 YD of V-146

## CUTTING INSTRUCTIONS

3 (Two) 35 1/2" Squares  
2 (Two) 2 1/2" x 22 1/2"




WFR-146  
Midnight Roof

## INSTRUCTIONS

Sew all rights sides together with 1/2" seam allowance. Press open.



- Start by hemming the edges of all the squares.
- Then begin constructing the front side of the dress. To accomplish this take two 35 1/2" squares and layer one on top of the other both facing right side of the fabric.
- Make a mark measuring 6 3/4" from the top right corner down.
- Make a mark measuring 10 3/4" from the bottom right corner to the left.
- Trace a line in between the marks with a fabric erasable marker.
- Sew on top of the line to attach both squares together.
- After you are done sewing trim the excess fabric on the side and leave 1/2" seam allowance.

(DIAGRAM 1)

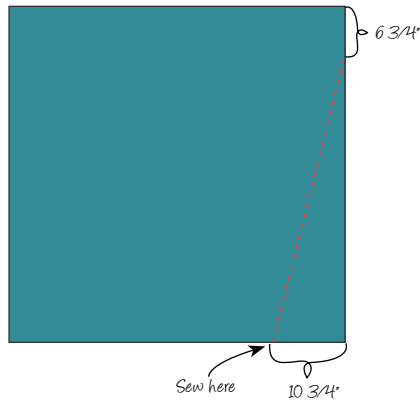

- Take the 35 1/2" square that is left and place it on top of the front side of the dress as shown in the diagram below.
- Fabrics should be facing right side.
- Pick one side to begin with and measure 9 1/2" from the top down and make a mark.
- Sew all the way down starting from the mark.
- Repeat the previous step of the other side.

(DIAGRAM 2)

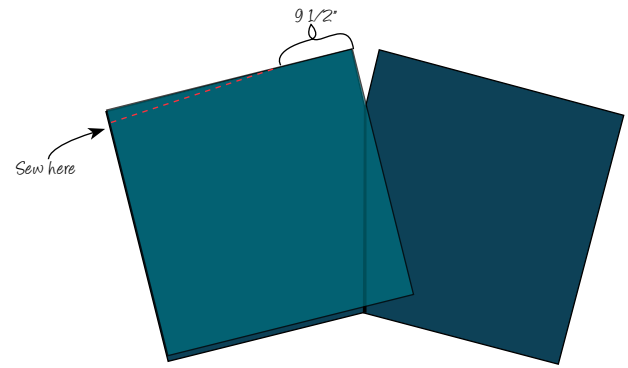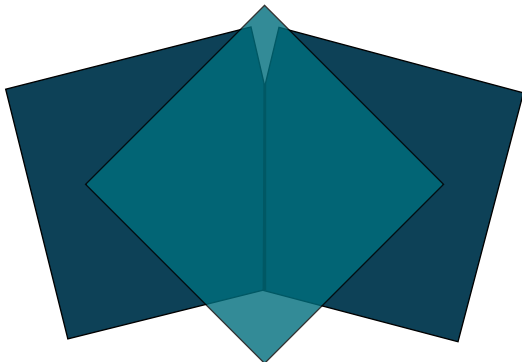

- To construct the straps take the 2 1/2" X 22 1/2" strips.
- Begin by folding one of the strips in half and iron it so it will mark down the middle.
- Unfold.
- Now take top and bottom edge and fold them to make them meet at the center fold and iron again.
- Fold again in half, iron and sew the open edge 1/8" away from the edge.
- Repeat the same steps with the other strap and hand stitch the strips on the front of the dress.
- Measure how low you will like the dress to be on the front and hand stitch both of the strips on the back of the dress.

(DIAGRAM 3)

