
PANDALICIOUS

Flying Candas Designed By AGF STUDIO




Flying Pandas

QUILT DESIGNED BY AGF/STUDIO

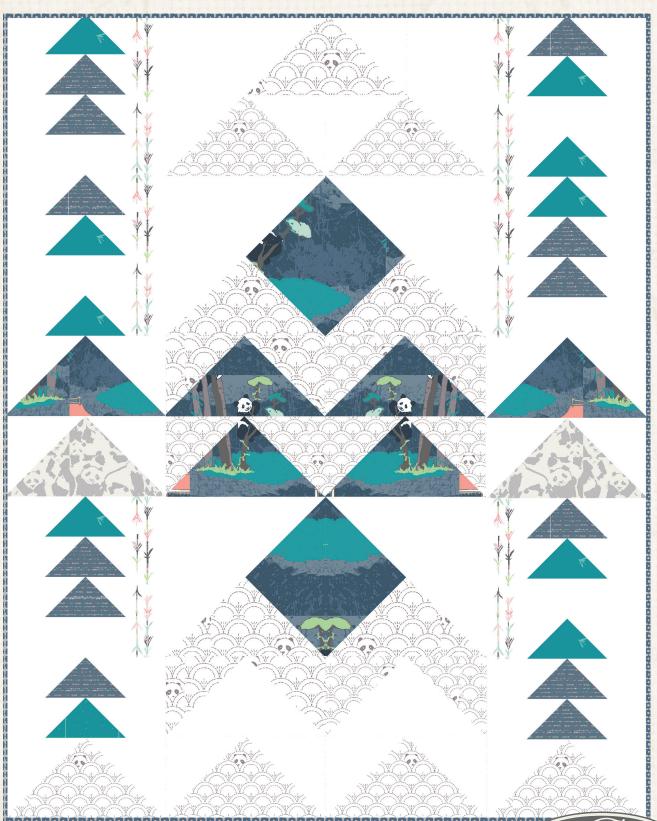



FABRICS DESIGNED BY KATARINA ROCCELLA







PND-10123



PND-10124




PND-10125 HIDDEN PANDA COTTONBUD GANSU VILLAGE CLOUDWHITE



PND-10126



PND-10127




PANDA PATCHES CONTRAST



PND-10130



PND-20120



PND-20121






PND-20123



PND-20124



PND-20124 HIDDEN PANDA LEAF



PND-20126 GANSU VILLAGE MINTGLOW PANDALINGS POD SHADOW





PND-20129



PND-20130





FINISHED SIZE | 64' × 80'

FABRIC REQUIREMENTS

Fabric A PE-433 3 ½ yd.
Fabric B PND-10120 ½ yd.
Fabric C PND-10125 2 yd.
Fabric D PND-20130 1 ⅓ yd.
Fabric E PND-20120 ½ yd.
Fabric F PND-20128 ¼ yd.
Fabric G PND-20123 ⅓ yd.

BACKING FABRIC

PND-10130 5 yds. (Suggested)

BINDING FABRIC

PND-20129 (Fabric H) ½ yd.

CUTTING DIRECTIONS

1/4" seam allowances are included. WOF means width of fabric.

Cut from Fabric A:

Forty-four (44) 4 ½' squares
Ten (10) 4 ½ x 8 ½ rectangles
Twenty-eight (28) 8 ½' squares
Six (6) 4 ½ x 16 ½ rectangles
Two (2) 8 ½ x 16 ½ rectangles
Two (2) 16 %' squares

Cut from Fabric B:

Six (6) 4 ½ x 16 ½ rectangles

Cut from Fabric C:

Twelve (12) 8 ½' squares Seven (7) 8 ½ x 16 ½ rectangles Four (4) Pattern Piece B *(Follow direction line)*

Cut from Fabric D:

Six (6) 4 ½ x 16 ½ rectangles Two (2) Pattern Piece A (Fussy Cut, follow line on pattern, ie. cut as DIAMOND, not square)

Cut from Fabric E:

Twelve (12) 4 ½ x 8 ½ rectangles



Cut from Fabric F:

Two (2) 8 ½ x 16 ½ rectangles

Cut from Fabric G:

Ten (10) 4 ½ x 8 ½ rectangles

CONSTRUCTION

Sew all rights sides together with 1/4" seam allowance.

Method for Making Flying Geese Units

This method for making flying geese preserves the direction of the fabric, which is very important for this design. Save the fabric cut off for future projects such as coordinating pillows.

This method uses a rectangle for the center, and two squares for the side triangles. The squares are about half the size of the rectangle. Make all flying geese in this method: (Diagram 1)

- 1. Mark the diagonals on the squares, each in a different direction.
- 2. Place square on left side of rectangle, lining up edges. Pin on line and flip up the fabric to check that the direction is correct. We don't want any upside down pandas.
- 3. Sew on the marked line
- 4. Cut off the top triangle of excess fabric, as shown, at a ¼' from stitching.
- 5. Fold back and press.
- 6. Repeat steps 2 & 3 with remaining square, the square should overlap the sewn edge slightly.
- 7. Cut off excess.
- 8. Press your flying geese unit.















DIAGRAM 1

Fabric A & G Flying Geese (x10)



Follow steps 1-8 to make ten (10) geese. Use:
 Ten (10) 4 ½ x 8 ½ rectangles (Fabric G) and
 Twenty (20) 4 ½' squares (Fabric A)

Fabric A & E Flying Geese (x12)




• Follow steps 1-8 to make twelve (12) geese. Use: Twelve (12) 4 ½ x 8 ½ rectangles (Fabric E) and Twenty-four (24) 4 ½' squares (Fabric A)



Fabric A & F Flying Geese (x2)

• Follow steps 1-8 to make two (2) geese. Use: Two (2) 8 ½ x 16 ½ rectangles (Fabric F) and Four (4) 8 ½' squares (Fabric A)




Fabric A & D Flying Geese (x2)

• Follow steps 1-8 to make two (2) geese. Use: Two (2) 8 ½ x 16 ½ rectangles (Fabric D) and Four (4) 8 ½' squares (Fabric A)




Fabric C & D Flying Geese (x4)

• Follow steps 1-8 to make four (4) geese. Use: Four (4) 8 ½ x 16 ½ rectangles (Fabric D) and Eight (8) 8 ½' squares (Fabric C)



Fabric C & A Flying Geese (x2)


• Follow steps 1-8 to make two (2) geese. Use: Two (2) 8 ½ x 16 ½ rectangles (Fabric A) and Four (4) 8 ½' squares (Fabric C)



Fabric A & C Flying Geese (x7)

• Follow steps 1-8 to make seven (7) geese. Use: Seven (7) 8 ½ x 16 ½ rectangles (Fabric C) and Fourteen (14) 8 ½' squares (Fabric A)

Flying Geese Block from Pattern (x2)



• Pin Fabric C triangle (Pattern B) to the left bottom edge of Fabric D diamond (Pattern A). Match the top corner. There will be overhang on the bottom. Double-check that the pandas are in the right direction. Sew the bottom edge. Repeat for the other side. (Diagram 2)

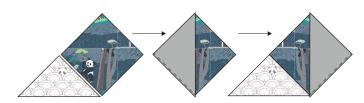


DIAGRAM 2

- Cut the (Fabric A) 16 %' squares on the diagonal and match the diagonal edge to the side of the triangle piece above. Sew. Repeat on the other side. (Diagram 3)
- Make 2 of these units.




DIAGRAM 3

Making Blocks

Block A & B

- Sew the following together (from top to bottom): Fabrics G/A sm. goose > Fabrics E/A sm. goose> Fabrics E/A sm. goose > 4 ½ x 8 ½ rectangle Fabric A. Make three (3) sets.
- Sew 4 ½ x 8 ½ rectangles in Fabrics A & B on either side according to the diagram.




Two (2) Block A

One (1) Block B DIAGRAM 4

Block C & D

- Sew the following together (from top to bottom):
 Fabrics E/A sm. goose > Fabrics G/A sm. goose>
 4 ½ x 8 ½ rectangle Fabric A > Fabrics G/A sm. goose. Make three (3) sets.
- Sew 4 ½ x 8 ½ rectangles in Fabrics A & B on either side according to the diagram.





One (1) Block C

Two (2) Block D DIAGRAM 5

Block E

 Sew the following together (from top to bottom): Fabrics D/A lg. goose > Fabrics F/A lg. goose (Make two)

Block F

 Sew the following together (from top to bottom): Fabrics D/C lg. goose > Fabrics D/A lg. goose (Make two)





Two (2) Block E


Two (2) Block F


Block G

• Sew the following together (from top to bottom): Fabrics E/A sm. goose > Fabrics G/A sm. goose. Sew (fabric A) 4 ½ x 8 ½ rectangles on either side of the geese piece. Then sew above of Fabric C/A lg. goose. (see diagram 7) (Make one)

Block H

Sew the following together (from top to bottom):
 Fabrics A/C lg. goose > Fabrics C/A lg. goose.
 (see diagram 7)
 (Make two)





One (1) Block G


Two (2) Block H DIAGRAM 7


Block I

• Sew the following together (from top to bottom): Fabrics E/A sm. goose > Fabrics E/A sm. goose. Sew (fabric A) 4 ½ x 8 ½ rectangles on either side of the geese piece. Then sew above of Fabric C/A lg. goose (see diagram 8) (Make one)

Center Top Block

- Row 1: 8 ½' square (Fabric A) > Fabric C/A lg. goose > 8 ½' square (Fabric A)
- Row 2: Fabric C/A lg. goose > Fabric C/A lg. goose
- Sew row one above row two. (see diagram 8) (Make one)





One (1) Block I

One (1) Center Top Block
DIAGRAM 8

ASSEMBLING THE TOP

Sew all rights sides together with \(^1\frac{4}{3}\) seam allowance. Press open.

Row 1

• Sew Block A > Center Top Block > Block D

Row 2

• Sew Block C > Pattern Block > Block B

Row 3

• Sew Block E > Block F > Block F > Block E

Row 4

• Sew Block A > Pattern Block > Block D

Row 5

- Sew Block G > Block H > Block H > Block I
- Sew Row 1 > 2 > 3 > 4 > 5

Refer to the cover illustration for assembly.

QUILT ASSEMBLY

Sew rights sides together.

- Take 5 yds of the suggested backing fabric and cut in half to obtain two (2) equal 90" long units.
- Sew them right sides together on the longer edge.
- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
 Make sure the print is in the correct orientation.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up.
 Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.


BINDING

Sew rights sides together.

- I suggest doing the Double Fold Binding, which has double thickness.
- Cut enough (8) strips 2 ¼ ' wide by the width of the fabric H to make a final strip 298' long. Fold and press the long binding strip in half widthwise (on the shorter side), wrong sides together.
- Start sewing the binding strip in the middle of one
 of the sides of the quilt, placing the strip right side
 down and leaving an approximated 5' tail. Sew with
 ¼' seam allowance (using straight stitch), aligning the
 strip's raw edge with the quilt top's raw edge.
- Stop stitching ¼' before the edge of the quilt (DIA-GRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring



- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to ¼' and press open. Complete the sewing. Turn binding to back of the quilt, and stitch by hand using blind stitch.

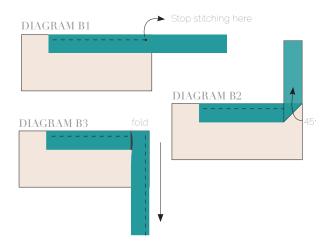



artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies.

Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2016 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.


3" x 3" Square

If this test square prints at a different size check printer settings to make sure you are printing at 100% original size.



PATTERN PIECE A

1/4" Seam Allowance included Cut 2

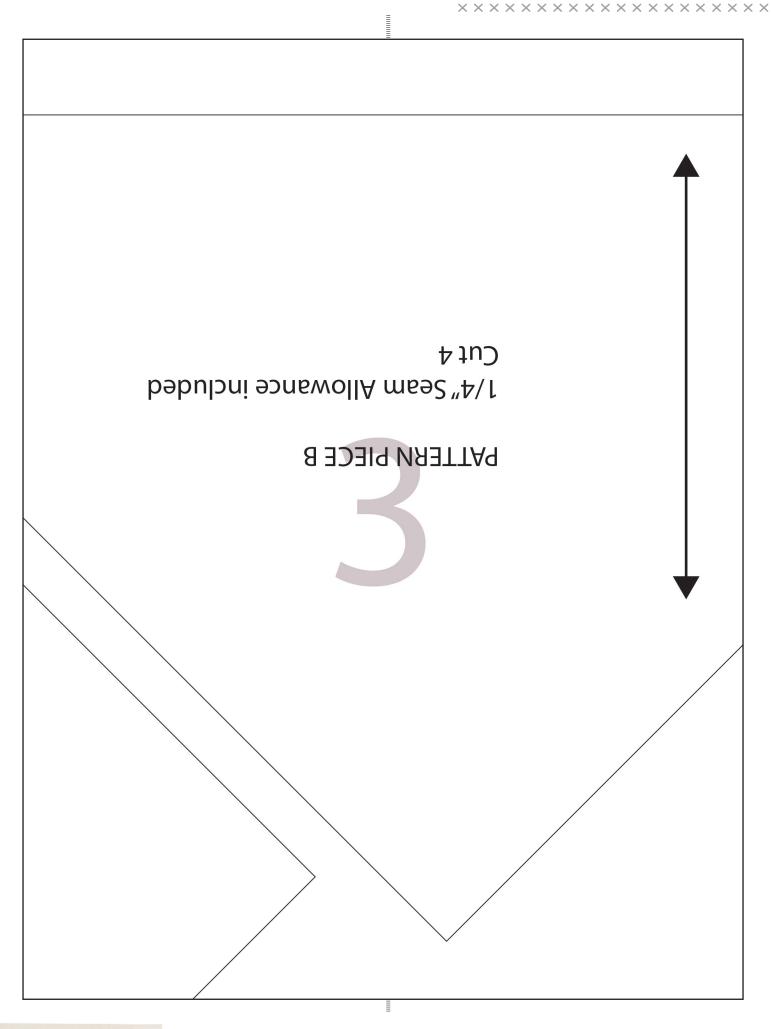

4





