



byAGF



AGFstudio





FABRICS DESIGNED BY AGF STUDIO




CAP-L-3000



CAP-L-3001



CAP-L-3002



CAP-L-3003



CAP-L-3004



CAP-L-3005



CAP-L-3006



CAP-L-3007



CAP-L-3008 LOVE MEANING



CAP-L-3009 ALL YOU NEED IS LOVE





FABRIC REQUIREMENTS

Fabric **A** CAP-L-3000 1½ yd. Fabric **B** CAP-L3005 1½ yd. Fabric **C** CAP-L-3002 4½ yd. Fabric **D** PE-413 2 ¾ yd.

BACKING FABRIC
CAP-L-3002 (Fabric C) (included)

BINDING FABRIC
PE-413 (Fabric D) (included)

CUTTING DIRECTIONS

1/4" seam allowances are included. WOF means width of fabric.

Two (2) 161/2" x WOF strips from fabric A

Two (2) 41/2" x WOF strips from fabric A

Two (2) 12½" x WOF strips from fabric B

Five (5) 11/2" x WOF strips from fabric B

Two (2) 3" x WOF strips from fabric B

Two (2) 33½ x 72½ rectangles from fabric C

One (1) 331/2" x 721/2" rectangles from fabric D

CONSTRUCTION

Sew all rights sides together with 1/4" seam allowance.

- Subcut two (2) 16½' x WOF strips from fabric **A** into eight (8) 16½' x 8½ rectangles.
- Subcut two (2) 4½' x WOF strips from fabric **A** into eight (8) 4½' x 8½ rectangles.
- Subcut two (2) 12½' x WOF strips from fabric **B** into eight (8) 12½' x 8½ rectangles.
- Subcut two (2) 1½° x WOF strips from fabric **B** into four (4) 1½° x 16½ strips.



- Subcut three (3) 1½' x WOF strips from fabric B into three (3) 1½' x 33½ strips.
- Subcut two (2) 3' x WOF strips from fabric B into two (2) 3' x 33½' strips.

ASSEMBLING THE TOP

Block Construction

- The sleeping bag features a block repeated eight (8) times.
- Take one (1) 16½' x 8½' rectangle from fabric **A**, one (1) 8½' x 4½' rectangle from fabric **A**, and one (1) 12½' x 8½' rectangle from fabric **B**,
- Join them as indicated in Diagram 1.
- Repeat eight (8) times.



- Take four (4) 11/2" x 161/2" strips from fabric B.
- Join them with the blocks following Diagram 2
- Repeat four (4) times






DIAGRAM 2

- Take two (2) 11/2" x 331/2" strips from fabric B.
- Join them with the blocks following Diagram 3
- · Repeat twice.






DIAGRAM 3

- Take one (1) 1½' x 33½' strips from fabric **B** and two (2) 3' x 33½' strips from fabric **B**.
- Join them to the blocks following Diagram 4.

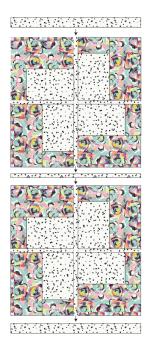


DIAGRAM 4

- Join the pieced part to the 33½ x 72½ rectangle from fabric D, for the outer part of the quilted sleeping bag.
- Join the two (2) 33½ x 72½ rectangles from fabric C, for the inside/backing of the sleeping bag.
- Follow Diagram 5 for fabric placement and attachment.







DIAGRAM 5

QUILT ASSEMBLY

Sew rights sides together.


- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the sleeping bag to proceed to bind it.

BINDING

Sew rights sides together.

- Cut enough strips 1½' wide by the width of the fabric **D** to make a final strip 285' long. Start sewing the binding strip in the middle of one of the sides of the sleeping bag, placing the strip right side down and leaving an approximated 5' tail. Sew with ¼' seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.
- Stop stitching ¼' before the edge of the sleeping bag (DIAGRAM B 1). Clip the threads. Remove the sleeping bag from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the sleeping bag (DIAGRAM B3). Start sewing at ¼' of the border, stitching all the layers. Do the same in the four corners of the sleeping bag.

- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the sleeping bag from under the machine presser foot. Lay the loose ends of the binding flat along the sleeping bag edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to ¼' and press open. Complete the sewing. Turn binding to back of the sleeping bag, turn raw edge inside and stitch by hand using blind stitch.

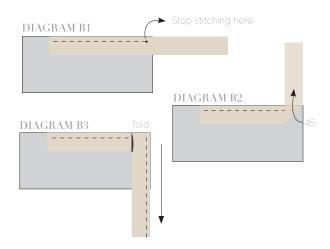

ZIPPER

 Saw a 100' zipper along the right and bottom side of the sleeping bag.

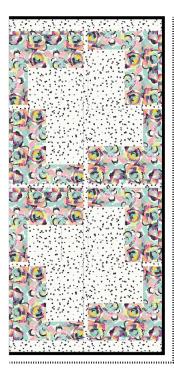


DIAGRAM 5





artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern. We are not responsible for printing errors or the way in which individual work varies.

Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

 \odot 2017 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.