














#### FABRICS DESIGNED BY KATARINA ROCCELLA



INB-26630



INB-26631




INB-26632



INB-26634 FLY AWAY VROEG



INB-26635



INB-26636 WEIDE IN BLUE



INB-26637 FIETSEN DAWN



INB-26638 BLOESEM ROYAL



INB-26639



INB-26640 BLAU BLOEM



INB-36630



INB-36631 CHINOISERIE KOBAL



INB-36632 HEXIESIS CADMIUM



INB-36633 DELFTEGELS



INB-36634 FLY AWAY LAAT



INB-36635



INB-36636 WEIDE IN ROSE



INB-36637 FIETSEN DUSK



INB-36638 BLOESEM SWEET



INB-36639





## FABRIC REQUIREMENTS

Fabric **A** INB-26634 % yd. Fabric **B** INB-26631 ¾ yd. Fabric **C** INB-26630 ¼ yd.

BACKING FABRIC

INB-26631 (Fabric B) (Included)

### **CUTTING DIRECTIONS**

1/4" seam allowances are included. WOF means width of fabric.

- Twelve (12) half hexie templates from fabric A.
- Eight (8) half hexie templates from fabric **B** and **C**.
- Two (2) 21' x 15' rectangles from fabric **B**.

## CONSTRUCTION

Sew all rights sides together with  $\frac{1}{4}$  seam allowance.

- Block A
- Take one template from fabric **A** and one template from fabric **C**.
- For fabric placement and attachment follow Diagram 1.






DIAGRAM 1




• Take one template from fabric **B** and join it as shown in Diagram 2.




- Keep joining the pieces until have 7 half hexie templates:
- A > C > B > A > C > B > A
- Make 2

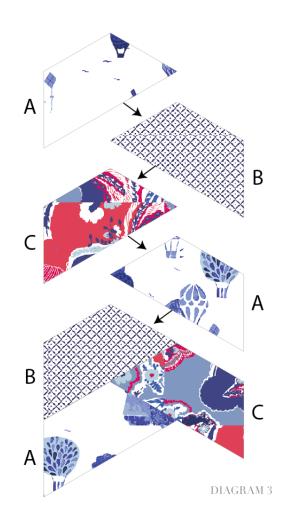

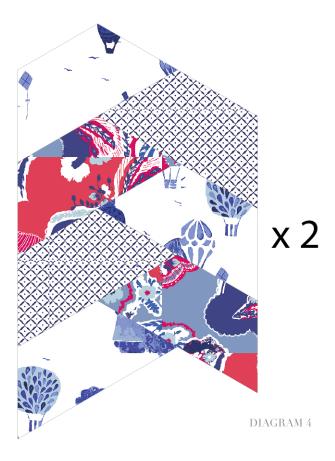

#### • Block B

- Block B is the mirror image of Block A
- Take one template from fabric **A** and one template from fabric **C**.
- For fabric placement and attachment follow Diagram 5.

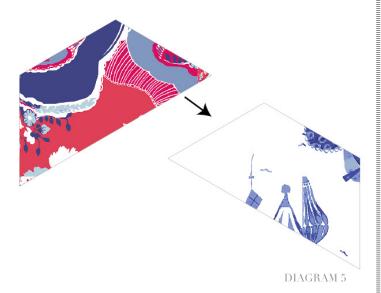

• Take one template from fabric **B** and join it as shown in Diagram 6.




DIAGRAM 6

- Keep joining the pieces until have 7 half hexie templates:
- A > C > B > A > C > B > A
- Make 2



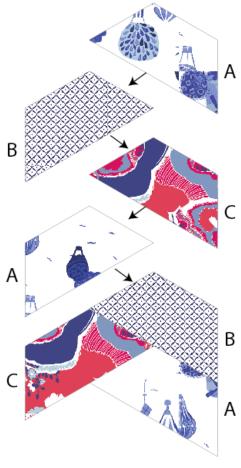


DIAGRAM 7




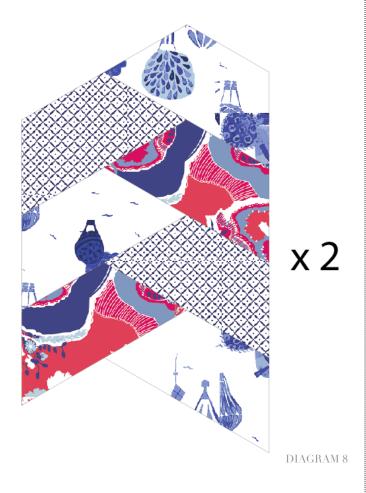

• Trim the four blocks as shown in Diagram 9 into 10 ½' x 10 ½' squares.

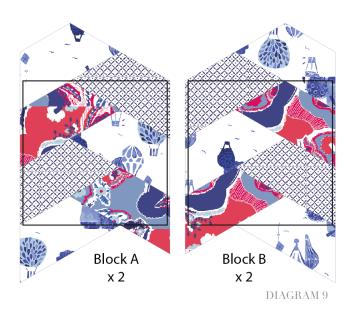

• Join the squares as shown on Diagram 10 to finish the pillow top.

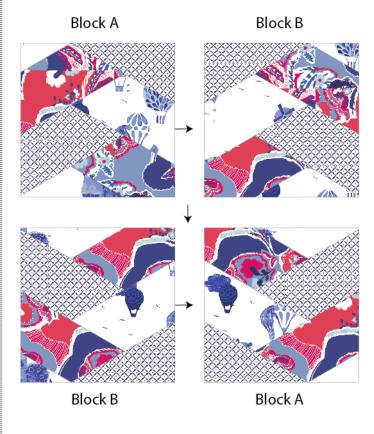

# PILLOW TOP ASSEMBLY

Sew rights sides together.

• Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.

DIAGRAM 10

- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting,



- To make a envelope back for your pillow take both 21' x 15' rectangles from fabric B and fold one 15' side on each rectangle in 1/2' and press and then fold another 1/2' and press.
- Top-stitch as close to th Half
- Hexie
- Template e edge as possible.
- Place rectangles right side together on top
  of each other to the front of your pillow and
  stitch all the way around your pillow at ¼ seam
  allowance.
- Clip corners at seam allowance and flip piece to the right side of the fabric.
- Fill pillow with a 20" x 20" pillow form and enjoy!





#### artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies.

Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2017 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.



