



ANGLES

TIME

TEA







FABRICS DESIGNED BY AMY SINIBALDI



DHS-1080



DHS-1081



DHS-1082 ROOFTILES SLATE



DHS-1083 FLUTTERDUST STARRY



DHS-1084 JOLIE PETAL



DHS-1085 MEADOW FIELD



DHS-1086 LUCY MAUVE



DHS-1087 PRAIRIE DOT FRESH



DHS-2080



DHS-2081 WALTZ SUNLIT



DHS-2082



DHS-2083



DHS-2084 JOLIE FRESH



DHS-2085



DHS-2086



DHS-2087 PRAIRIE DOT SERENE





FINISHED SIZE | 60" × 60"

FABRIC REQUIREMENTS

 Fabric A
 DHS-1086
 % yd.

 Fabric B
 DHS-1085
 1 % yd.

 Fabric C
 DHS-2085
 1 % yd.

 Fabric D
 DHS-1083
 1 ½ yd.

 Fabric E
 DHS-1080
 ½ yd.

BACKING FABRIC

4 ½ yds. Fabric C (Suggested)

BINDING FABRIC

½ yd. Fabric **E** (included)

CUTTING DIRECTIONS

1/4" seam allowances are included. WOF means width of fabric.

Eight (8) 6 1/2" x 6 1/2" squares from Fabric A

Eight (8) 12 1/2" x 6 1/2" rectangles from Fabric A

Sixteen (16) 6 1/2" x 6 1/2" squares from Fabric B

Sixteen (16) 12 1/2" x 6 1/2" rectangles from Fabric B

Sixteen (16) 6 1/2" x 6 1/2" squares from Fabric C

Eighteen (18) 12 1/2" x 6 1/2" rectangles from Fabric C

Ten (10) 6 1/2" x 6 1/2" squares from Fabric D


Eight (8) 12 1/2" x 6 1/2" rectangles from Fabric D

CONSTRUCTION

Sew all rights sides together with 1/4" seam allowance.

Flying Geese Construction

- Place a marked 6 ½" square from Fabric **B** right sides together on the left side of a 12 ½" x 6 ½" rectangle from Fabric **A** as shown.
- Stitch on the drawn line. Trim seam allowance to ¼". Press corner open. In the same manner, sew a 2-½" square to the remaining corner, trim and press.

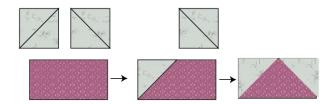

• Repeat the same process for the following fabrics:

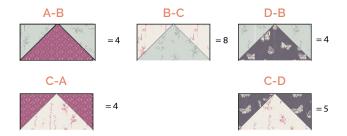


DIAGRAM 1

ASSEMBLING THE QUILT TOP

• Follow Diagram below for each Flying Geese and rectangle assembly pieces:



 ${\rm DIAGRAM}~2$

• Now, follow Diagram below for each row assembly:

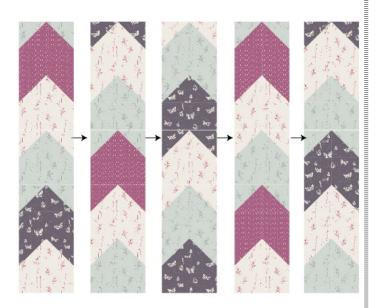


DIAGRAM 3

QUILT ASSEMBLY


- Cut Backing Fabric into 2 equal rectangles, each 2 ¼ yd. x WOF. Trim off selvage edges and sew them together along this lengthwise edge, right sides together. Press open the seam.
- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.

BINDING

Sew rights sides together.

- Sew your 5 WOF binding strips together to make a final strip 250' long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5' tail. Sew with 1/4' seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.
- Stop stitching ¼' before the edge of the quilt (DIA-GRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at ¼' of the border, stitching all the layers. Do the same in the four corners of the quilt.

- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to ¼' and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.
- Congrats! You've finished your beautiful Quilt!

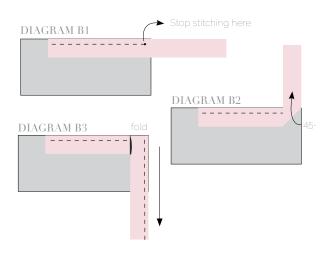





artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies. Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2017 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.