cable knit






by AGF






DESIGNED BY AGF/STUDIO

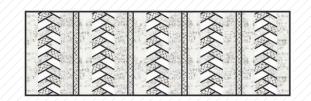

AGEstudio




FABRICS DESIGNED BY AGF STUDIO



CAP-RV-8000 MEASURED TEMPO



CAP-RV-8001 WAVES OF ECHO



CAP-RV-8002



CAP-RV-8003



CAP-RV-8004 WHITE NOISE



CAP-RV-8005



CAP-RV-8006



CAP-RV-8007



CAP-RV-8008 PHONOGRAPHIC GRIDS



CAP-RV-8009 FONT AND FREQUENCY







FINISHED SIZE | 60' × 20'

FABRIC REQUIREMENTS

Fabric **A** CAP-RV-8004 % yd. Fabric **B** CAP-RV-8005 ½ yd. Fabric **C** PE-433 ¼ yd. Fabric **D** PE-413 ¾ yd.

BACKING FABRIC CAP-V-2002 1 yd. (Suggested)

BINDING FABRIC
CAP-V-2004 (Fabric **D**) (included)

CUTTING DIRECTIONS

1/4" seam allowances are included. WOF means width of fabric.

Five (5) WOF x 2 strips from fabrics A, B, and C.

Ten (10) 10½" x 3½" strip from fabric A,

Four (4) 201/2" x 11/2" strips from fabrics **B**,

Eight (8) 201/2" x 3/4" strips from fabric D,

Fifteen (15) WOF x 34" strips from fabric D,

CONSTRUCTION

Sew all rights sides together with 1/4" seam allowance.

- Take fifteen (15) WOF x ¾' strips from fabric D
 and five (5) WOF x 4 ¾' strips from fabric A, B,
 and C.
- Join each WOF x 3/4" strip to every WOF x 2" strip.
- Take template a and subcut it from all the fifteen (15) previous strip sets.
- For fabric placement and attachment follow Diagram 1.





DIAGRAM 1

- Take one template a from fabric **C** and one template a from fabric **A**.
- Align the short side from fabric **C** with the long side from fabric **A**.
- · Join both pieces.
- Take one template a from fabric **B**.
- Align the long side from fabric B with the side of the previous piece that has fabric A and C.
- Keep adding the pieces following the same order until you have 8 of each fabric:
- C-A-B-C-A-



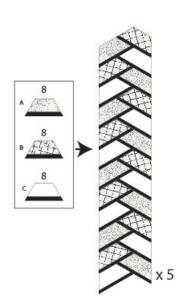



DIAGRAM 2

- Take eight (8) 20½° x 3½° strips from fabric **A**, eight (8) 20½° x ¾°strips from fabric **D**, and four (4) 20½° x 1½° strips from fabric **B**.
- Make four (4) strip sets of: A D B D A



DIAGRAM 3

- Take two (2) 201/2" x 31/2" strips from fabric **A**, the four (4) strip sets, and the five (5) braids.
- Join them as shown in Diagram 4.
- Then trim it to a 60½' x 20½' rectangle.

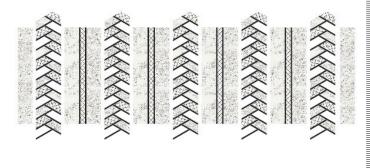

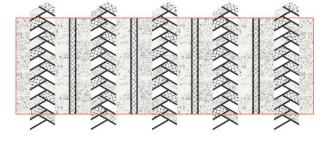


DIAGRAM 4



TABLE RUNNER ASSEMBLY

Sew rights sides together.


- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.

BINDING

Sew rights sides together.

- Cut enough strips 1½' wide by the width of the fabric **D** to make a final strip 170' long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5' tail. Sew with ½' seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.
- Stop stitching ½' before the edge of the quilt (DIA-GRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at ¼' of the border, stitching all the layers. Do the same in the four corners of the quilt.

- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to ¼' and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.

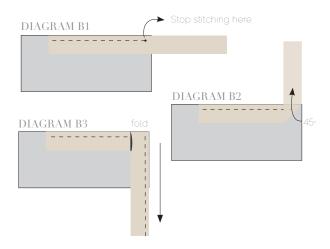





artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern. We are not responsible for printing errors or the way in which individual work varies

Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2018 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.

