





Cubic Square

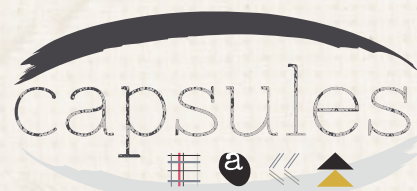


by AGF

FREE PATTERN




Cubic Square



raise THE volume


FABRICS DESIGNED BY AGF STUDIO



CAP-RV-8000
MEASURED TEMPO



CAP-RV-8001
WAVES OF ECHO




CAP-RV-8002
TWINKLING TUNE




CAP-RV-8003
CITY SOUNDS



CAP-RV-8004
WHITE NOISE




CAP-RV-8005
HARMONY FENCE

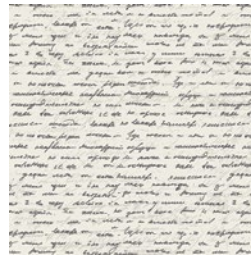


CAP-RV-8006
LYRICIST'S DIARY




CAP-RV-8007
SONIC FLORA



CAP-RV-8008
PHONOGRAPHIC GRIDS



CAP-RV-8009
FONT AND FREQUENCY

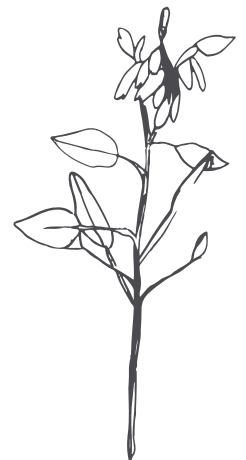

Cubic Square

FINISHED SIZE | 18" x 22"

FABRIC REQUIREMENTS

Fabric A	CAP-RV-8003	1 yd
Fabric B	CAP-RV-8004	¼ yd
Fabric C	PE-413	⅙ yd

BACKING FABRIC
CAP-RV-8003 (Included)

CUTTING DIRECTIONS

¼" seam allowances are included.
WOF means width of fabric.

Six (6) 3 ⅞" perfect square from fabric **A,C**

Six (6) 3 ½" perfect square from fabric **B,C**

Two (2) 2 ½" x 18 ½" rectangle from fabric **A**


Two (2) 18 ½" x 3 ½" rectangle from fabric **A**

CONSTRUCTION

Sew all rights sides together with ¼" seam allowance.

- Start with the HST assembly, by pairing an 3 ⅞" square from Fabric **A** and an 3 ⅞" square from Fabric **C**
- Place on top with right sides together. Draw a diagonal line from one corner to the other.
- Sew on each side of the line you drew at 1/4". (DIAGRAM 1)
- Cut on your diagonal line. Press seams open (DIAGRAM 1.1)

- Square off half square triangles to equal 3 ½" x 3 ½" (DIAGRAM 1.2)

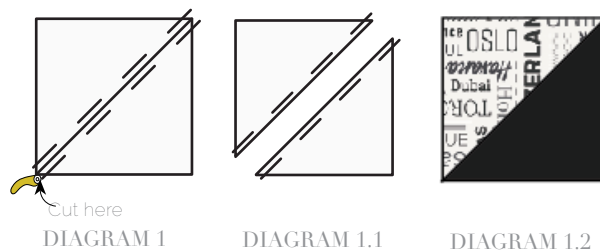

- Repeat the same process until you have twelve (12) HST

ASSEMBLING THE TOP

Sew all rights sides together with ¼" seam allowance. Press open.

- Follow diagram below for each HST and square assembly, then pair each row accordingly


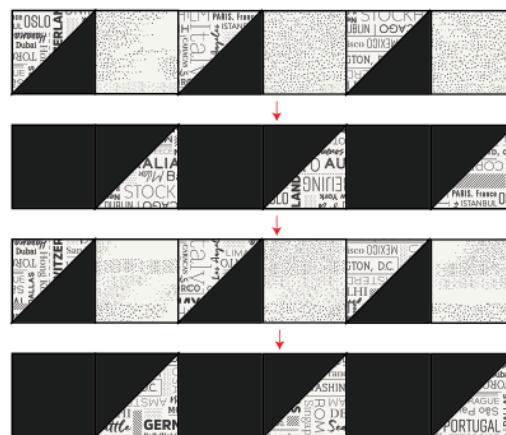


DIAGRAM 2

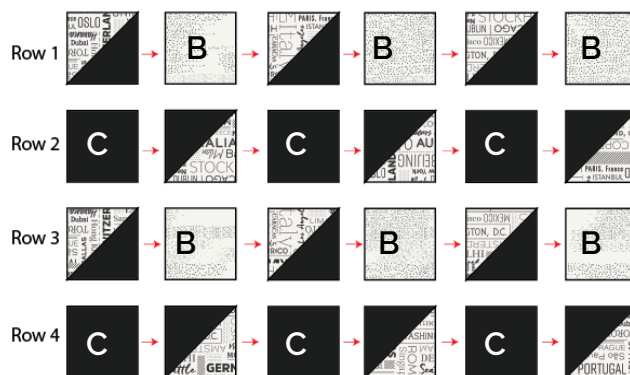