





by AGF





CAR ORGANIZER DESIGNED BY AGEstudio



FABRICS DESIGNED BY AGEstudio





Fabric A
CAPST1108
PLANETARIUM



Fabric B CAPST1107 STARDUST



Fabric C
CAPST1100
SPATIAL FRIENDS



Fabric D

CAPST1105


HAPPY MOONS



Fabric E

CAPST1101

CONNECT THE STARS



Fabric F CAPST1102 LUNAR STAMPS



Fabric G PE430 MOONSTONE



Fabric H (Binding)
CAPST1103
INTERRUPTED SIGNAL





FINISHED SIZE | 18" × 28"

Please read all instructions thoroughly before beginning.

FABRIC REQUIREMENTS

Fabric A	CAPST1108	FQ.
Fabric B	CAPST1107	FQ.
Fabric C	CAPST1100	FQ.
Fabric D	CAPST1105	FQ.
Fabric E	CAPST1101	FQ.
Fabric F	CAPST1102	FQ.
Fabric G	PE430	1½ yd.
Fabric H	CAPST1103	¹⁄₄ yd.

BACKING FABRIC

Fabric G PE430 (Included)

BINDING FABRIC

Fabric H CAPST1103 ½ yd. (Included)

OTHER MATERIALS (no Included)

Medium Weight Interfacin	ıg 2 yd.
1/4" Elastic	10 in.
1" Elastic	38 in.
Batting	(28" x 19")

Our Fat Quarter measurement is 22" x 18".

CUTTING DIRECTIONS

Please ensure that all fabrics are ironed thoroughly before cutting them. ½" seam allowances are included. WOF means width of the fabric.

Fabric A

• One (1) 6" x 10" rectangle. (Pocket 1)

Fabric B

- One (1) 6" x 10" rectangle. (Pocket 2).
- One (1) 11" x 12" rectangle. (Pocket 7).

Fabric C

- Two (2) 9" x 10" rectangles. (Pockets 3 & 5).
- One (1) 4" x 13" strip. (Top strap).
- One (1) 4" square. (Sunglasses strap).

Fabric **D**

- One (1) 9" x 13" rectangle. (Pocket 4).
- One (1) 4½" x 12" strip. (Pocket 9).

Fabric E

• One (1) 10" square. (Pocket 6).

Fabric F

- One (1) 7" x 12" rectangle. (Pocket 8).
- One (1) 4½" x 12" strip. (Pocket 9).

Fabric G

- One (1) 28" x WOF and sub-cut:
 - Two (2) 28" x 19" rectangle. (Main Body).
- One (1) 71/2" x WOF and sub-cut:
 - One (1) 7½" x 31" rectangle. (Row 2: Pockets 3, 4 & 5).
- One (1) 9½" x WOF and sub-cut:
 - One (1) 9½" x 12" rectangle. (Pocket 7).
 - One (1) $8\frac{1}{2}$ " x 10" rectangle. (Pocket 6).
 - One (1) 5½" x 12" rectangle. (Pocket 8).
- One (1) 4½" x WOF and sub-cut:
 - Two (1) 4½" x 10" rectangles. (Pockets 1 & 2).
 - One (1) 3" x 12" strip. (Pocket 9).

Fabric H

Three (3) strips of 2½" x WOF (Binding)

Interfacing

- One (1) $7\frac{1}{2}$ " x 31" rectangle. (Row 2).
- One (1) 9½" x 12" rectangle. (Pocket 7).
- One (1) 8½" x 10" rectangle. (Pocket 6).
- One (1) $5\frac{1}{2}$ " x 12" rectangle. (Pocket 8).
- Two (2) 4½" x 10" rectangles. (Pockets 1 & 2).
- One (1) 3" x 12" strip. (Pocket 9).

CONSTRUCTION

Sew all rights sides together with ½" seam allowance.

Fuse interfacing to the wrong sides of all pocket lining pieces of fabric **G**.

• Make a template for the curved top portion of the main body pieces. Cut a rectangle 7" x 19" and fold in half. Measure out 5" from the fold at the top and mark a point ½" from the bottom edge. Draw a smoth curve connecting both points and cut off the cornesrs at the curve. Lay this template against the Main Body pieces, lining up the top edges and sides and trimming the edges at the curves. At this point you may want to measure your car seat to see if you need to change the dimensions of the organizer. You may want to make a full size Main Body Template to lay againts your car seat back.

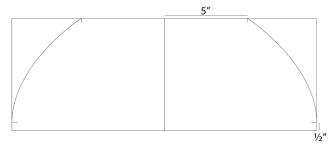


DIAGRAM 1

ROW 2 (Pockets 3, 4 & 5)

Take two (2) $9" \times 10"$ rectangle fabric \mathbb{C} , and one (1) $9" \times 13"$ rectangle from fabric \mathbb{D} . Sew them at $\frac{1}{2}$ " seam allowance and press the seams open.

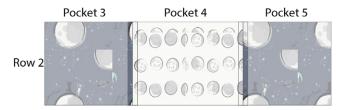


DIAGRAM 2

• Match all pocket fabrics to their corresponding linings, wrong sides together, lining up the bottom edges, so they match. With the lining facing up, fold over the pockets fabric ¾", so the edges meets the top edge of the lining fabric, then fold over another ¾" so the top

edge of the lining is enclosed in the pocket fabric and press. Topstitch at 5%". Press again to set stitches.

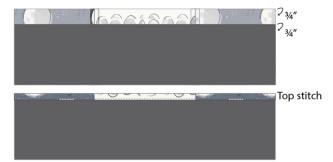


DIAGRAM 3

• Now stack Pockets 7, 8 and 9 together, with 7 on the bottom and 9 on the top. Match bottom edges and pin together. Mark straight lines from bottom to the top edges of pocket 8 at 2", 4" and 6" from the left edge. Sew the marked lines making sure to backstitch a couple times at the top edge of pocket 8.

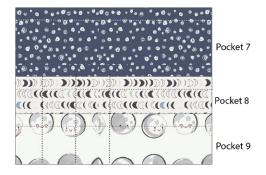


DIAGRAM 4

• Insert the ¼" elastic piece in the top edge of pocket 6. Tack it down on the right side and safety pin at the other side so it does not become drawn into the casing during handling. Leave the pocket flat for now.




DIAGRAM 5

- Finish the following edges of the pockets with either a serger or a zig-zag stitch on the sewing machine.
 - Pocket 1 bottom and right edge.
 - Pocket 2 bottom and left edge.
 - Row 2(Pockets 3, 4, 5) bottom edge.
 - Pocket 6 right edge.
 - Pocket 7, 8, 9 left edge.
- Prepare the main body of the organizer as you would a quilt sandwich: a main body piece right side down, batting, topped with the remaining main body piece right side up. Safety pin layers together and quilt on the diagonal every two inches. A free motion motif would suit as well if you prefer that to diagonal lines.

Finishing Pockets 1 & 2

- Press ½" under on the right side of Poket 1 and the left side of Pocket 2. Baste or pin the edges down.
- Make ½" pleats on those same sides, making sure to end the pleats about ¼" away from the pressed under edges so that you can easily sew that side down. Press pleats and clip or pin in place.
- Make a line 5" down from the top of the organizer and line up the raw bottom edges of Pockets 1 & 2 to it, lining facing up. Line up the bottom edges of pockets to the sides of the organizer and sew at ½" seam allowance.
- Flip the pockets up and sew down the center side seams on pockets at approx 1/4" making sure not to catch the pleat when sewing. Be sure to backstitch several times on top and bottom of stitching.

Sunglasses Strap

- Press your sunglasses strap strip in half lengthwise, then open and fold the edges in so they meet at the middle fold line and press sides. Fold closed and press again.
- Edge stitch all around.
- Fold under ½" on each end.
- Place between Pockets 1 & 2, lining up the top edge so it matches the top edge of the pockets and stitch down the sides.

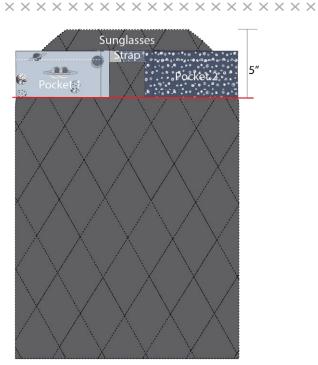


DIAGRAM 6

Row 2: Pockets 3, 4 & 5

- Finished size of pockets will be 5" wide for 3
 & 5 and 8" wide for pocket 4.
- Press 1" pleats towards both center seams and at the side edges. Pleats should just touch each other and be centered over the seams. For side edge pleats make sure the pleated edge ends a little over ½" away from the side edge (to leave room for binding and any minimal trimming). Clip or pin pleats in place.



DIAGRAM 7

- Measure 9" inches down from the bottom of Pockets 1 & 2 and draw a line. Turn the pleated pocket strip (3, 4, 5) upside down, lining side up. Align the bottom edge with the marked line. Sew ½" from the edge. fold the strip up. There should be about 2½" between pocket rows.
- Stitch in the ditch between center seams to create the individual pockets, making sure to backstitch at both ends and not catch the pleats while sewing.
- Baste stitch the sides down to the organizer within the seam allowance.

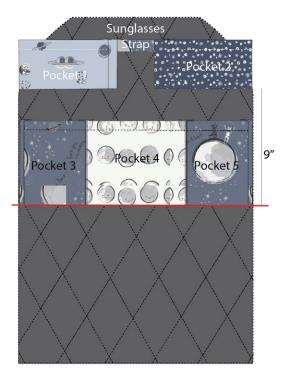


DIAGRAM 8

Pocket 6

- Press ½" under on the right side.
- Mark the center at the bottom of the pocket and make a 1" pleat. Pin or baste stitch the pleat at the bottom only.
- Match the raw edges on the bottom and left side to the bottom left corner of the organizer and clip in place.
- Sew the right side down, making sure to backstitch several times on each end and to securely catch the elastic.
- Baste stitch the bottom down within the seam allowance, turning at the corner and basting the left side stopping before reaching the elastic casing.
- Now, pull about 3-4" of elastic out and pin down. Check with your favorite water bottle or baby bottle to see if you need to adjust the elastic. When you are happy with it securely finish stitching the left side, making sure to backstitch several times on the elastic to hold it. Trim off excess.

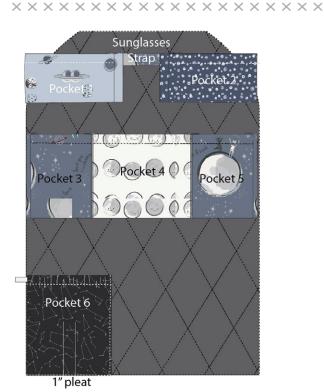


DIAGRAM 9

Pockets 7, 8 9

- Press ½" under on the left side of the pocket trio.
- Clip to the organizer, matching up raw edges on the bottom and right side.
- Sew the left side down.
- Baste the right and bottom sides.



Trim edges on the organizer to prepare edges for binding.

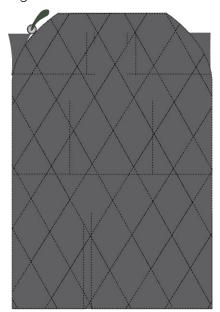


DIAGRAM 11

Top Strap

Take one (1) 4" x 13" strip from fabric \mathbb{C} . Fold and press in the same manner as sunglasses strip,

 Tack down ends to the back of the organizer at 5" on either side of the center point (Center 10").

Bottom Elastic

 Take the 25" long piece of 1" elastic and tack to the back of the organizer where your seat has it's bend.

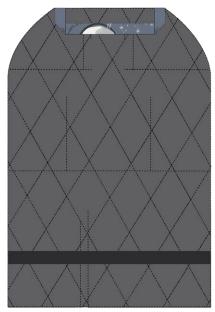


DIAGRAM 12





DIAGRAM 13

BINDING


Sew rights sides together.

- Cut enough strips 2½" wide by the width of the fabric H to make a final strip 102" long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5" tail. Sew with ¼" seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.
- Stop stitching ½" before the edge of the quilt (DIAGRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at ¼" of the border, stitching all the layers. Do the same in the four corners of the quilt.

- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is
- Trim seam to ¼" and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.


difficult to see).

• If you are using our 2.5 edition (binding fabric), click or scan this QR code to see a tutorial on how to use this specialty fabric.

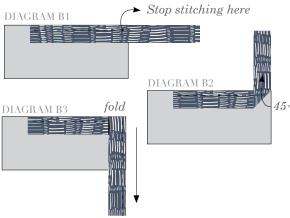



artgalleryfabrics.com



Congratulations & enjoy



artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies.

Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2024 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.