

# FUSIONS

FREE PATTERN

\*\*\*\*\*



FABRICS DESIGNED BY AGF STUDIO



FUS-AD-1602 ROSES & LETTERS DISTRICT



FUS-AD-1609 SCREAM, YOU SCREAM DISTRICT



FUS-AD-1603 TARTAN DISTRICT

PE-441 BLUEBERRY ZEST






FUS-AD-1600 CAT NAP DISTRICT



 $\begin{array}{c} FUS\text{-}AD\text{-}1601\\ \text{WAVES OF ECHO DISTRICT} \end{array}$ 



FUS-AD-1608 PHONOGRAPHIC GRIDS DISTRICT









FUS-AD-1606 CITY SOUNDS DISTRICT



FUS-AD-1607 TRIPIXELS DISTRICT



FUS-AD-1604 ASPHODEL DISTRICT



FUS-AD-1605 STRAWS OF DISTRICT



FEEL THE DIFFERENCE © 2018 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.

## FINISHED SIZE | 6"x 10"

# FABRIC REQUIREMENTS

Fabric <mark>A</mark>	FUS-AD-1601- Fat 8th
Fabric <b>B</b>	FUS-AD-1602- Fat 8th
Fabric <b>C</b>	FUS-AD-1603- Fat 8th
Fabric D	FUS-AD-1605- Fat 8th
Fabric <mark>E</mark>	FUS-AD-1606- Fat 8th
Fabric <b>F</b>	FUS-AD-1607- Fat 8th
Fabric <mark>G</mark>	PE-441- Fat 8th
Fabric <b>H</b>	PE-425- Fat 8th
Fabric I	PE-406- Fat 8th
Fabric <b>J</b>	PE- 428 - Fat Quarter

# CUTTING DIRECTIONS

1/4" seam allowances are included.

### 1" x 6 1/1"2 strips:

• Three (3) from Fabric A,B,C,D,F,G,H,and I

#### 1" x 12 1/2" strips:

- Two (2) from Fabric F
- One (1) from Fabric B,C,D,G,H, and I
- Two (2) 7" x 12" rectangles from Fabric E and J (Exterior and lining) Also cut two fuse interfacing and fuse to back of Fabric J pieces.
- One (1) 2" x 13" strip from Fabric J (Strap)
- Cut Two flaps from Fabric J and two from fusible fleece interfacing.

# CONSTRUCTION

Sew all rights sides together with ¼"seam allowance. Unless noted otherwise.

- Sew the following 6 1/2" strips together as follows:
- F G C A B I D H F G C A B I D - H - F - G - C - A - B - I - D - H



DIAGRAM 1

- Cut out one flap pattern from your strip set.
- Next sew the following 12 1/2" strips together as follows: F G C A B I D H F
- Cut out one flap pattern from your strip set.





DIAGRAM 2

#### Attaching the Magnet Snap

- Fuse fusible interfacing to both of your flap patterns from Fabric J.
- Note: A magnetic snap has two main components, a male side & a female side. The magnetic snap also comes with a backing washer for each component.
   When you purchase a magnetic snap, you will receive 4 metal pieces in total.
- Find the midpoint of one of your flap lining pieces and measure down 1' and place a small 1'x 2' piece of ultra firm stabilizer. Iron stabilizer into place. Mark the 1' mark on top of stabilizer.
- Place a washer on this mark. Mark with a pencil two lines, from top and bottom tracing inside the rectangles on the washer. (Diagram 3)



artgalleryfabrics.com

- Remove the washer and make two slits on those marks using a small pair of sharp scissors.
- Place the arms of the male magnet clasp through the slits from the right side of the strip.




DIAGRAM 4

- Put the washer over the arms from the fusible side.
- Using pliers, fold each arm of the clasp out and down in opposite directions around the washer. Make the arms as flat as a possible.




DIAGRAM 5

- To create your top flap sew this piece right sides together to your vertical stripe flap pattern leaving the top portion unsewn.
- Flip right side of flap out and topstitch 1/4" around the edge of your flap.



• Repeat this same process with your remaining flap pattern from Fabric J, sew right sides together to your other stripe flap pattern.



- To attach the female side of the magnetic snap repeat the same process following Diagram 3-5 with the female magnetic snap and attach to your second flap unit.
- Topstitch your second flap unit to the front exterior of your clutch.

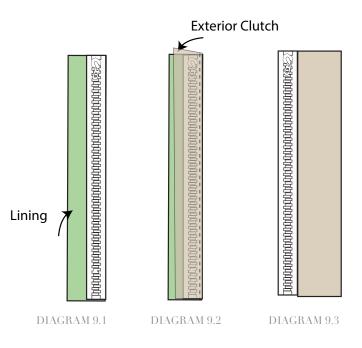


DIAGRAM 8

### **Zipper Construction**

Insert your zipper foot-

- Take lining and front clutch and sandwich them inbeween your 12' zipper.
- Using a zipper foot sew as close to the zipper teeth as possible.
- Sew the two pieces of fabric with right sides together with the zipper sandwiched inbetween the two pieces of fabric (Diagram 9.1- 9.3)
- Press fabric away from zipper and edge stitch the seam allowance to the lining sewing as close the edge as possible..



artgalleryfabrics.com

- Attach your front flap to the back of your clutch.
  With right sides together stitch your flap to the top of your back clutch.
- Repeat steps from Diagram 9.1-9.3 to attach the other side of the zipper using your other lining piece and back clutch. Trim excess zipper if needed.



DIAGRAM 10

#### Strap and Final Construction

- To create your strap take your 2' x 13' strip from Fabric J. Fold raw edges into the middle of your strip and press. Then fold in half and press again.
- Topstitch on both edges of your straps at about  $1/8^{\prime}$  .




DIAGRAM 11

• Fold your strap in half and place ends 1' from the top of your side clutch and stitch into place.



DIAGRAM 12

- Unzip zipper. Take the two fronts of the clutch and pin right sides together.
- Take the lining pieces and pin right sides together.
- Sew all the way around bag leaving a unsewn portion in the bottom of the lining of the clutch.
- Pull right side of the fabric through the unsewn portion. Hand stitch or machine stitch unsewn portion closed.



• Enjoy your perfect size clutch, big enough to fit your phone, sunglasses, keys, and money. This is a fun bag to carry when you run to lunch on your work break or out to dinner with your friends or significant other.



# Congratulations

`\*`\*`\*`\*`\*`\*`\*`\*`\*`\*





# artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies. Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

@ 2018 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.