
featuring SUMMERSIDE COLLECTION BY DANA WILLARD





ANGLES



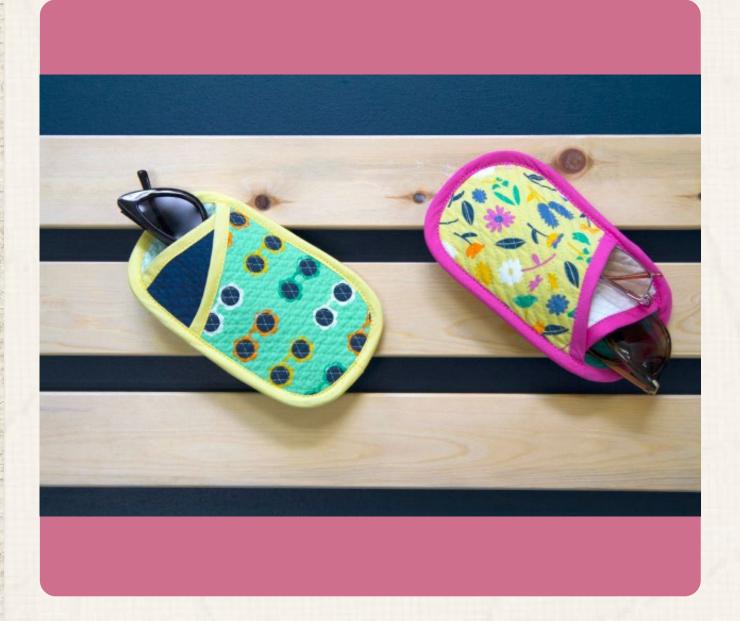



Summer Side

FABRICS DESIGNED BY DANA WILLARD





SMS-73200 BUNGALOW BLOOM SUNRISE



SMS-73201 BACKYARD BERRY TANG



PINEAPPLE



SMS-73203 POPSICLE PARTY WATERMINT



SMS-73204 BACKYARD BERRY CANDY



SMS-73206 SUNNY SHADES MINT



SMS-73207 SEASIDE STRIPES TANGERINE



SMS-73208SWIMSUIT SOIREE SEAFOAM





SMS-83200 BUNGALOW BLOOM MOONRISE



SMS-83201 BACKYARD BERRY CHERRY



SMS-83202 BREEZY BLOSSOMS LEMONADE



SMS-83203 POPSICLE PARTY SPEARMINT



SMS-83205 SEASIDE STRIPES SEAGLASS



SMS-83206SUNNY SHADES MELON



SMS-83207 SEASIDE STRIPES SUNNY



SMS-83208 SWIMSUIT SOIREE COASTLINE





FABRIC REQUIREMENTS

 Fabric A
 SMS-73206
 F8.

 Fabric B
 PE-467
 F8.

 Fabric C
 PE-451
 F8.

 Fabric D
 PE-446
 ½ Yd.

CUTTING DIRECTIONS

1/4" seam allowances are included. WOF means width of fabric.

Fabric A

- Cut one (1) Back Pattern.
- Cut one (1) Front Pattern.

Fabric B

• Cut two (2) Center Pattern.

Fabric C

- Cut one (1) Back Pattern.
- Cut one (1) Front Pattern.

Fabric D

• Cut one (1) 1½" x WOF strip long for binding.

CONSTRUCTION

Sew all rights sides together with 1/4" seam allowance.

Step 1

- Take one (1) Back Pattern from Fabric A and Fabric C.
- Place batting in betwen Fabric A and C. Quilt as desire.
 Trim excess batting and put aside.

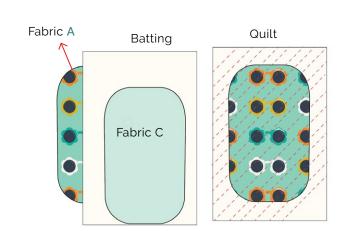




DIAGRAM 1

 Repeat step 1 with the two (2) Center Pattern from fabric B, then bind it with the 1½" strip from fabric D on the top part and set aside.

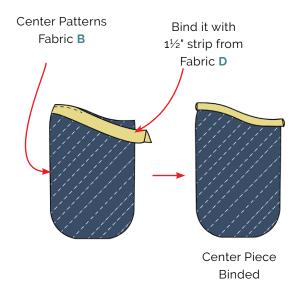


DIAGRAM 2

Repeat step 1 with the front pattern from fabric A and
 C then bind it with the 1½" strip from fabric D on the top part and set aside.

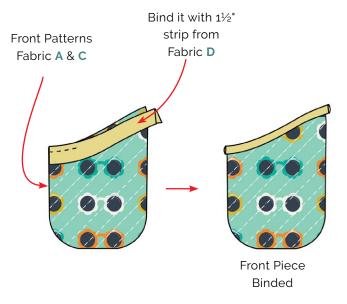


DIAGRAM 3

• Arrange the finished pieces as shown on diagram below and base stitch all around it.

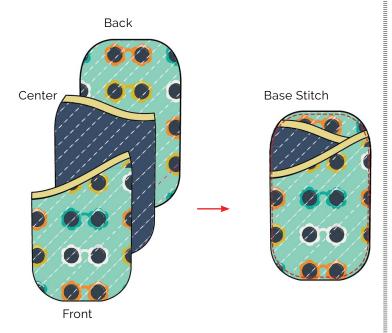


DIAGRAM 4

 With the 1½" strip from fabric D bind all around the sewn piece.



Finished Binded Case

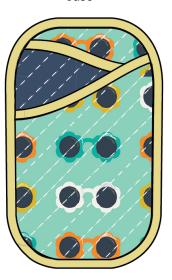



DIAGRAM 5

BINDING

Sew rights sides together.

- Cut enough strips 1½" wide by the width of the fabric **D** to make a final strip 50" long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5" tail. Sew with ¼" seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.
- Stop stitching ¼" before the edge of the quilt (DIAGRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at ¼" of the border, stitching all the layers. Do the same in the four corners of the quilt.
- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the piece from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to ¼" and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.



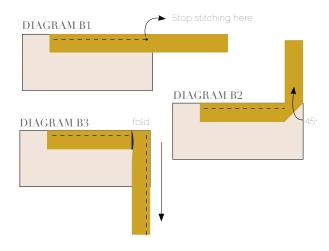



FEEL THE DIFFERENCE

artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies. Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2023 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.

1" Square Test

DOUBLE EYEGLASS CASE

BACK

