featuring OH, MEOW collection by JESSICA SWIFT

See Kittens



A DIVISION OF AGE

X

FREE PATTERN



PROJECT DESIGNED BY AGEstudio



∋OH, MEOW! €







OHM-33442 KITTEN AROUND



OHM-33447 FELINE GOOD



OHM-33445 CATURDAY FUN



PAW-SOME DAY

ADDITIONAL BLENDERS FOR THIS PROJECT





See Kittens

FINISHED SIZE | 23" × 14"

FABRIC REQUIREMENTS

CUTTING DIRECTIONS

¹/₄" seam allowances are included. WOF means width of fabric.

- Six (6) hexie template from fabric **A** (fussy cut, see diagram 1).
- Six (6) hexie template from fabric **B** (fussy cut, follow diagram 1).
- Four (4) hexie template from fabric **C**.
- Four (4) hexie template from fabric **D**.
- Four (4) hexie template from fabric **E**.
- One (1) $23\frac{1}{2}$ " x $14\frac{1}{2}$ " rectangle from fabric **F**.
- Two (2) 16" x $14\frac{1}{2}$ " rectangles from fabric **F**.
- Two (2) $1\frac{1}{2}$ " x WOF strips from fabric **G** (piping).

CONSTRUCTION

Sew all rights sides together with ¹/₄"seam allowance.


English Paper Piecing (EPP) Construction

- Cut your twenty six (26) hexie templates and hole punch or cut the middle circle.
- Pin a hexie template to fabric **A**, making sure you fussy cut the cat.
- Cut out around the template with a ³/₈" seam allowance.
- Your seam allowance does not have to be exact because the template will be an accurate guide.
- Cut a total of 6 from fabric A.



DIAGRAM 1

Repeat the same process for fabric B.



• For fabric **C**, **D** and **E**, you don't need to fussy cut, so cut all four pieces from each fabric.




DIAGRAM 3

- Place a template right side down on the wrong side of a fabric piece and fold the seam allowance over one edge. Beginning with a knot on the right side of the fabric, baste the seam allowance in place; stitch through the fabric with ¼"-long stitches. Finger-press the basted edge.
- As you approach a corner, fold the seam allowance of the next edge over the template and continue stitching. Stitch all edges in the same manner. Don't knot the thread as you finish, but do leave a thread tail of about ½" or so on the fabric's right side.




DIAGRAM 4

- Using a whip stitch, stitch the hexagons together forming a line following diagram 5.
- Use two (2) fabric **A** and two (2) fabric **B** hexies for one row.
- Assemble three (3) columns following diagram 6.




DIAGRAM 6

 Take fabric C, D and E and repeat the same whip stitch construction, assembling four (4) rows as following the diagram below.



DIAGRAM 7

- When all the pieces are complete, press all the hexagons with a steam iron to set the folds, front and back.
- Remove the paper templates. The templates have a handy hole in the center, which makes popping out the paper super easy and doesn't disturb the outer folds.
- Simply insert the end of a stylus, crochet hook or the point of a small pair of scissors, then lift the template up and out of the completed hexagon.




DIAGRAM 8

- Quilt fabric **F** $23\frac{1}{2}$ " x $14\frac{1}{2}$ " rectangle.
- Using the diagram below as guidance, place the completed arrangement of hexagons onto the quilted pillow front rectangle.
- Pin in place the first D-C-E unit, measuring the distance from the top 3¹/₂", bottom 3¹/₂" and left side 2".




DIAGRAM 9

- Place the second hexie (**A-B-A-B**) at a ³/₄" distance from the first hexie.
- Continue pining following the diagram below.



DIAGRAM 10

- Set up the sewing machine for a decorative appliqué stitch.
- Do some test stitching to figure out which stitch pattern and stitch settings work best for you.
- Start at a corner and use the decorative stitch to sew the paper pieced segments in place on the quilted pillow top.

Creating the Piping

- Cut enougth of bias strip from fabric **G**. After cutting your strips there will be a diagonal cut on each end. You will need to square off the ends before attaching.
- Attach all of your squared off bias strips to make one long bias tape to enclose the cording.
- With rights sides together, lay your bias strips perpendicular to each other and pin in place. With a water soluble marker, draw a 45-degree angle.

- Stitch across this line and press open. Trim away excess, leaving a ¹/₄" seam allowance.




DIAGRAM 11

- Insert the cording inside fabric G strip.
- Align the folded bias tape face to face with the edge of the pillow top.
- Sew them together using a zipper foot and starting 2" from the edge of the bias tape.




DIAGRAM 12

- When you get to the corner, make three clips into the seam allowance. This will help the piping lay flat when going around each of the four corners.
- After sewing all the curves and going around the rectangle, stop 4" before the starting stitch, and align the cording to get them ready to be cut.
- Make sure the cords are lined up and they meet.
- Fold one raw edge of the bias tape towards the inside and place it over the other raw edge of the bias tape to hide your cordings making sure they are tucked in.
- Finish the stitch.




DIAGRAM 13

CREATING THE BACK PILLOW

Sew all rights sides together with ¼" seam allowance. Press open.

- Take both $23\frac{1}{2}$ " x 9" rectangles from fabric **F**.
- Fold one bottom edge ½" towards the wrong side of the fabric of one of the rectangle.
- Fold the same edge ½" again and edge stitch the fold in place to have a clean edge.
- Repeat the same for the top edge of the bottom piece.
- Take the quilted pillow top and lay it flat right side up.
- Take one (1) rectangle from fabric **F** and align it wrong side up to the top side of the pillow top.
- Take the other rectangle from fabric **F** and align it wrong side up to the bottom side of the pillow top.
- Pin the pieces in place and sew around the edges at 1/4".
- Clip the corners and flip the piece to the right side of the fabric.
- Fill the pillow with a 23" x 14" pillow form and enjoy.





 ${\rm DIAGRAM} \ 14$

Congratulations

/ * */* * * */*/* * * */*/* * */*/* * */*/* * */*/* * */*/* * *




artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern. We are not responsible for printing errors or the way in which individual work varies.

Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2021 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.

EPP TEMPLATES

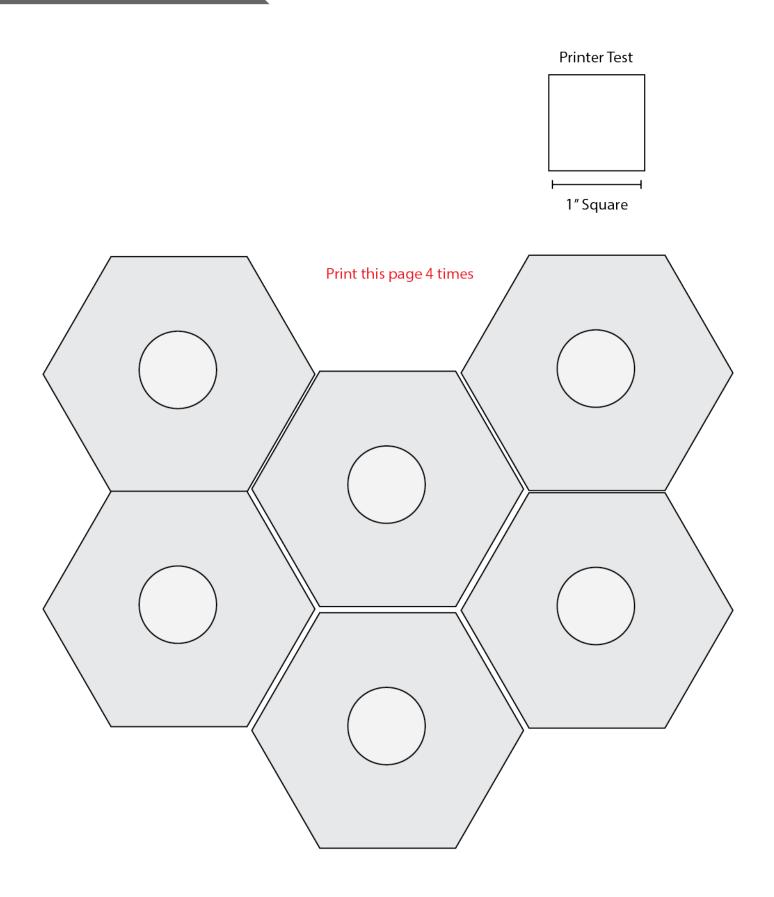

artgalleryfabrics.com