

VERTICAL GARDEN

FINISHED SIZE | 60" x 80"

FABRIC REQUIREMENTS

Fabric A	PE-414	¼ yd.
Fabric B	FUSRF-1505	2 7/8 yd.
Fabric C	PE-412	5/8 yd.
Fabric D	FUSRF-1506	7/8 yd.
Fabric E	FUSRF-1500	¾ yd.
Fabric F	PE-408	7/8 yd.
Fabric G	FUSRF-1507	¾ yd.
Fabric H	FUSRF-1509	7/8 yd.
Fabric I	FUSRF-1501	½ yd.
Fabric J	PE-454	7/8 yd.

BACKING FABRIC

FUSRF-1500- 5 yds. *(Suggested)*

BINDING FABRIC

FUSRF-1506 (Fabric **D**) *(Included)*

CUTTING DIRECTIONS

¼" seam allowances are included.

- Two (2) 2½" x WOF strips from fabric **A**.
- Thirty eight (38) 2½" x WOF strips from fabric **B**.
- Seven (7) 2½" x WOF strips from fabric **C**.
- Six (6) 2½" x WOF strips from fabric **D**.
- Nine (9) 2½" x WOF strips from fabric **E**.
- Eleven (11) 2½" x WOF strips from fabric **F**.
- Nine (9) 2½" x WOF strips from fabric **G**.
- Eleven (11) 2½" x WOF strips from fabric **H**.
- Six (6) 2½" x WOF strips from fabric **I**.
- Eleven (11) 2½" x WOF strips from fabric **J**.

CONSTRUCTION

Sew all rights sides together with ¼" seam allowance.

- You will sew the strips together into six (6) different strip sets and cut 3½" wide strips from the sets at a 45° angle.
- To maximize the fabric used, don't match ends of the strips, instead place the next strip in the set at 2" away from the end of the previous strip.
- Before sewing your strips together pin them and refer to the diagrams below to make sure your strips are angled in the right direction.
- Align your 45° mark on the ruler with the end of the strip set and cut off the ends of the strip to make a smooth edge.
- Then align your ruler's edge to the angled edge and measure out 3½" from the edge and cut the strip. Cut the number of strips called for each strip set as below.
- Strip sets **A, B** and **C** will sewn in the direction of diagram 1 and strip sets **D, E, F** are mirror images and will be sewn in the direction of diagram 2.

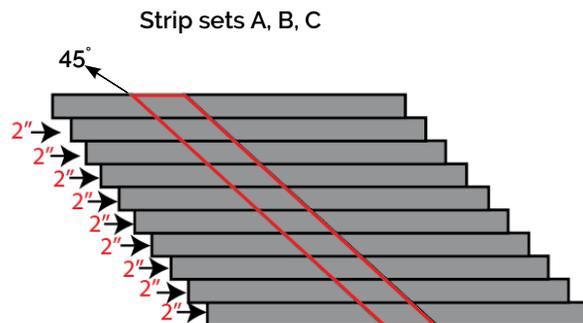


DIAGRAM 1

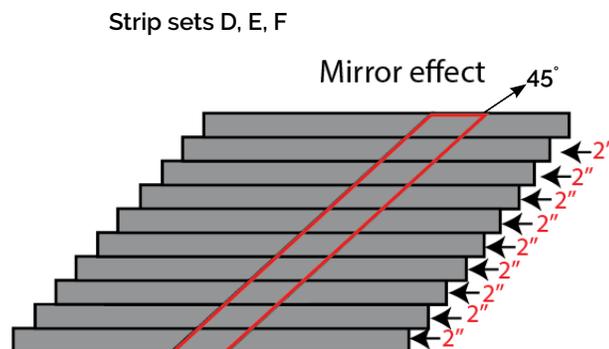


DIAGRAM 2

