

FREE PATTERN

A DIVISION OF AGF

ANGLES



QUILT DESIGNED BY AGEstudio





FABRICS DESIGNED BY ALEXANDRA BORDALLO



GRH14400 DAHLIA'S GARDEN




GRH14405 GROW YOUR OWN



GRH14409 FLOWERY MEADOWS BRIGHT



GRH14402 DEEPLY ROOTED



GRH14406 LINED SEEDBED FRESH



GRH14410 ROAMING HENS SUN




GRH14401 SEEDED FIELDS



 $\begin{array}{c} GRH14404 \\ \mbox{FLOWERY MEADOWS PALE} \end{array}$



ADDITIONAL BLENDERS FOR THIS PROJECT





PE-408 WHITE LINEN

PE-447 PATINA GREEN



FE-532 HAY



FABRIC REQUIREMENTS

Fabric A	GRH14400	¼ yd.
Fabric B	GRH14409	⅔ yd.
Fabric C	GRH14406	⅔ yd.
Fabric D	FE-532	³⁄₄ yd.
Fabric E	GRH14401	1⁄2 yd.
Fabric F	GRH14405	5∕8 yd.
Fabric G	GRH14402	³⁄₄ yd.
Fabric H	PE-408	5∕8 yd.
Fabric	PE 447	1 yd.
Fabric J	GRH14410	½ yd.

BACKING FABRIC GRH14404 4¾ yds (Suggested)

BINDING FABRIC Fabric | PE-447 (Included)

CUTTING DIRECTIONS

¹/₄" seam allowances are included. WOF means width of the fabric.

Six (6) 6¹/₂" squares from fabric A.
Twelve (12) 7¹/₄" squares from fabric B.
Six (6) 6¹/₂" squares from fabric B.
Twelve (12) 6⁷/₈" squares from fabric C.
Twelve (12) 7¹/₄" squares from fabric D.
Six (6) 7¹/₄" squares from fabric E.
Twelve (12) 6⁷/₈" squares from fabric F.
Twelve (12) 7¹/₄" squares from fabric G.
Forty eight (48) 3⁷/₈" squares from fabric I.
Six (6) 7¹/₄" squares from fabric J.

CONSTRUCTION

Sew all rights sides together with ¼ "seam allowance.

Four at a time Flying Geese

- Star by placing one 3⁷/₈" square from fabric H on each opposit corner of a 7¹/₄" square from fabric **B**.
- Draw a diagonal line.
- Sew ¼" on each side of the drawn line and cut throught the line.
- Now place another 3⁷/₈" square from fabric H and place it on the right bottom corner.
- Draw a diagonal line and sew ¹/4" on each side of the line.
- Cut throught the line and press open. Make a total of forty eight (48) HBH flying geese combination.
- Repeat the same technique with twelve (12) 7¹/₄" square from fabric **G** and forty eight (48) squares from fabric **I**.
- Make a total of forty eight (48) **IGI** flying geese combination.

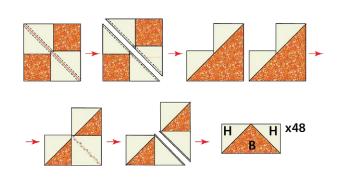


DIAGRAM 1


- Repeat the HST construction with twelve (12) 7¹/₄" square from fabric **G** and forty eight (48) 3⁷/₈" squares from fabric **I**.
- Make a total of forty eight (48) IGI flying geese combination.



DIAGRAM 2

HST construction

- Place one (1) 7¹/₄" square from fabrics D and E right sides together.
- Mark a diagonal line on the wrong side of the square.
- Sew ¹/₄" away on each side of the drawn line.
- Using a rotary cutter cut the square on the drawn line.
- Trim each HST to a 67/8" square.
- Make a total of twelve (12) DE hst.



• Repeat the same technique with six (6) 7¹/₄"squares from fabrics **D** and **J**.




DIAGRAM 4

Split Quarter Square Triangle Technique

- Place one (1) 6⁷/₈" square from fabric C and one (1) DE hst right sides together.
- Draw a line perpendicular to the HST seam.
- Sew ¹/₄" away on each side from the drawn line.
- Using a rotary blade cut the squares following the drawn line.
- Trim each piece to a $6\frac{1}{2}$ " square.
- Make a total of twenty four (24) DEC pieces.



DIAGRAM 5

• NOTE: the 2 Split Quarter Square Triangles made will NOT be identical – they are mirror images.




DIAGRAM 6

DIAGRAM 3

- Repeat the Split Quarter Square Triangle Technique with:
- Twelve (12) DJ hst and twelve (12) 67/8" square from fabric F.
- Make a total of twenty four (24) DJF pieces.
- Note that twelve (12) pieces out of the twenty four (24) DJS pieces will be DJS1 and the other twelve (12) will be DJF2. See diagram below for reference.

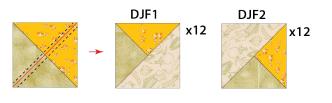


DIAGRAM 7

• Take two (2) **HBH** flying geese and sew them together as shown on diagram below. Make a total of twenty four (24) **HBH1** pieces.


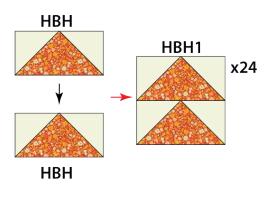



DIAGRAM 8

• Take two (2) IGI flying geese and sew them together as shown on diagram below. Make a total of twenty four (24) IGI1 pieces.

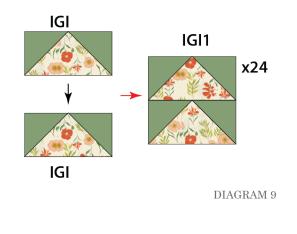

Block 1

 Arrange two (2) DEC1, two (2) DEC2, four (4)
 HDH1 and one (1) 6¹/₂" square from fabric A into 3 rows of three pieces each. See diagram below for reference. Make a total of six (6) block 1.

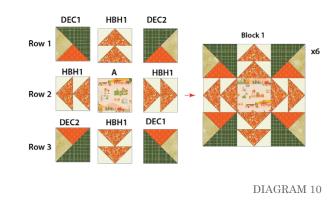

Block 2

 Arrange two (2) DJF1, two (2) DJF2, four (4) IGI1 and one (1) 6½" square from fabric B into 3 rows of three pieces each. See diagram below for reference. Make a total of six (6) block 2.



• See diagram 12 for reference.

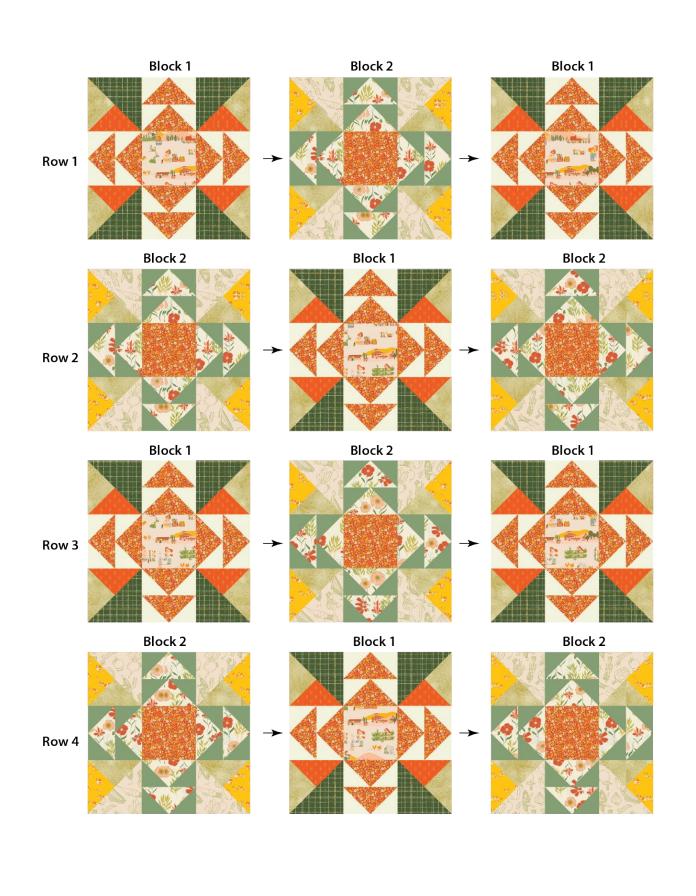


DIAGRAM 12

Sew rows together.

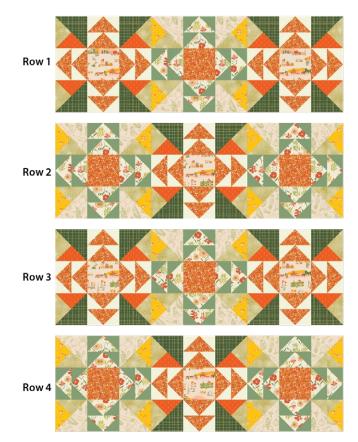


DIAGRAM 13

Quilt as desired



QUILT ASSEMBLY

Sew rights sides together.

- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.


BINDING

Sew rights sides together.

- Cut enough strips 1¹/₂" wide by the width of the fabric I to make a final strip 262" long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5" tail. Sew with ¹/₄" seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.
- Stop stitching ¼" before the edge of the quilt (DIAGRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot.
 Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2).
 Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at ¼" of the border, stitching all the layers. Do the same in the four corners of the quilt.

DIAGRAM 14

- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to ¼" and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.

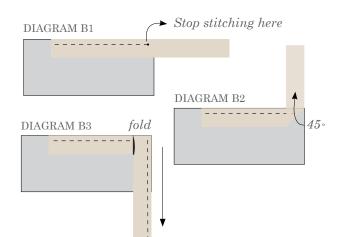



\x/x x x x/x/x x x x/x/x



artgalleryfabrics.com

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies.

Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2022 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.