

# SEW QUICK

PROJECT INFO



PROJECT NAME: Triangle Tote

FINISHED SIZE: 16" x 14½" x 2"


COLLECTION: LINEN BLEND SOLIDS

FABRIC REQUIREMENTS

WOF is based on 58" width from our Linen Fabrics measurements.



**FABRIC A**  
DENL4005  
VINTAGE DENIM  
⅞ yd.



**FABRIC C**  
DENL4004  
ASHEN  
¼ yd.



**FABRIC B**  
DENL4000  
SOFT SAND  
¼ yd.



**FABRIC D**  
DENL4006  
SUN-KISSED  
1¼ yd.

CUTTING DIRECTIONS

¼" seam allowances are included.  
WOF means width of fabric.

**FABRIC A**

- (2) 2¾" x WOF strips.
- (2) 20" x 18" rectangles (Lining).

**FABRIC B**

- (2) 2¾" x WOF strips.

**FABRIC C**

- (1) 2¾" x WOF strip.
- (4) templates.

**FABRIC D**

- (26) templates.
- (5) 1½" x WOF strips.
- (1) 20" x 18" rectangle.
- (1) 4" x WOF strips (Straps).

CONSTRUCTION

Sew all rights sides together with ¼" seam allowance.


- Sew (1) 1½" x WOF strip from fabric **D** and (1) 2¾" x WOF strip from fabric **A**. Repeat with fabrics **DB** and **DC**. Then, place the triangle template on the assembled strip block. Use notches to align it to the seam and cut template as shown.




- Make the following combinations:




- Follow the diagram below for rows assembly, then sew rows together.

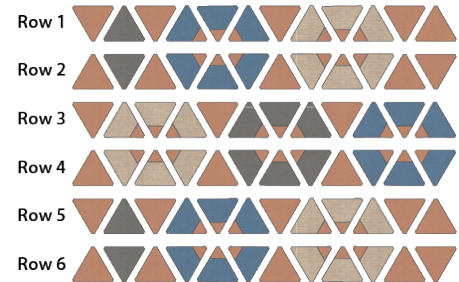

- Trim the unit so it measures 20" x 18" and sew the front and back of the tote RST and the two lining pieces from fabric **A**, leave a small opening.
- At the corners of your tote and lining draw a 1½" square on the wrong side of the fabric. Take the exterior of the bag (wrong side out) and pinch apart the two layers of the tote to get a little triangle on one corner. Flatten it down and make sure the top and bottom seams are lined up. Repeat this for the other side of the tote and lining pieces.

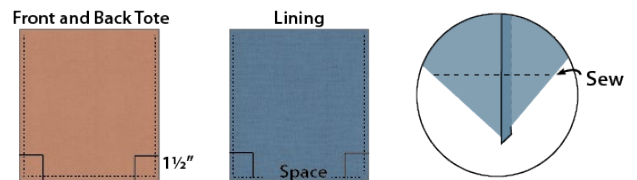

- Now, place the bag exterior inside the lining, making sure right sides are touching. Sew all the way around at the top of your bag and pull the exterior through the unsewn space in the lining. Handstitch unsewn portion to close it.
- Take (1) 4" x WOF strip from fabric **D**. Fold it in half and trim to 20". Fold both long sides of your strip into the center of your strip and then fold in half. Press and top stitch both sides of your strap at ¼". Stitch handles ½" facing the right side of the bag. Secure the straps by stitching a rectangle on each strap.

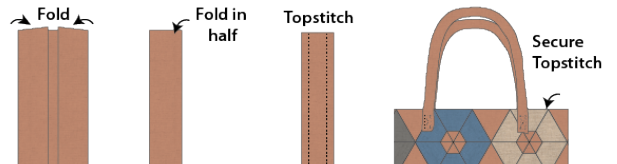


SEW  
QUICK

Printer Test



1" Square

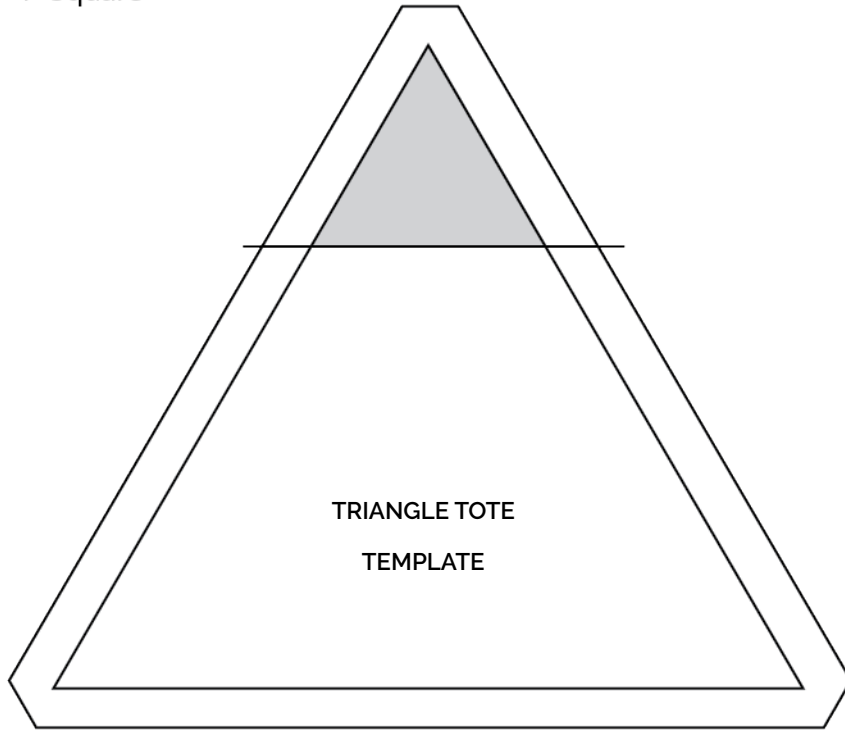

ART GALLERY FABRICS®