

# SEW QUICK

PROJECT INFO



PROJECT NAME: QUICK LINEN PILLOW

FINISHED SIZE: 17½" x 17½"

COLLECTION: LINEN BLEND SOLIDS

FABRIC REQUIREMENTS



**FABRIC A**  
DENL4000  
SOFT SAND  
¾ Yd



**FABRIC C**  
DENL4002  
WHITE LINEN  
¾ Yd



**FABRIC B**  
DENL4006  
SUNKISSED  
¾ Yd

CUTTING DIRECTIONS

¼" seam allowances are included.  
WOF means width of fabric.

**FABRIC A:**

- (16) 3⅞" squares.
- (5) 3½" squares.

**FABRIC B:**

- (3) 3⅞" squares.
- (1) 3½" square.

**FABRIC C:**

- (13) 3⅞" squares.
- (4) 3½" squares.

CONSTRUCTION

Sew all rights sides together with ¼" seam allowance.

**Half Square Triangle Construction**

- Start by placing (1) 3⅞" square from fabrics **A** and **C** right sides facing each other. Mark a diagonal line on the wrong side of the top fabric square. (Fig1)
- Sew a **SCANT** ¼" seam on each side of the diagonal line. Press the sewn square to set the seams and with a rotary cutter cut through the drawn line. (Fig 2)
- Open each half square triangle (HST) unit outward and lightly press. Be careful to only press up and down, NOT back and forth so as not to stretch them. Your seams should be pressed (both layers) towards the darker color. Trim each half square triangle (HST) to a 3½" square. Make a total of (26) **AC** half square triangle unit.

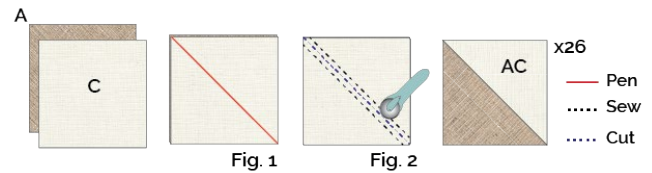


DIAGRAM 1

- Follow the Half Square Triangle construction with (3) 3⅞" squares from fabrics **A** and **B**. For these project you will only need (5) **AB** units.




DIAGRAM 2

- Sew all HST units and 3½" squares into (9) rows. For fabric placement and attachment follow the diagram below; then, sew rows together. Rotate the piece to 45° and trim excess fabric.

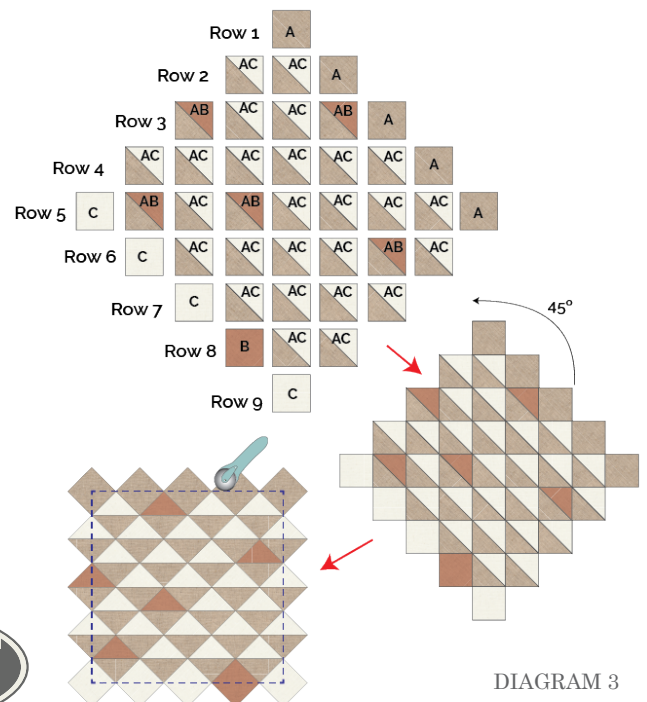


DIAGRAM 3