

TOTE BAG - HIGHLANDS EDITION

FINISHED SIZE | 15½" x 18"

A fat quarter width of fabric (WOF) is typically 22"-wide.  
Cutting instructions are based on 22"-and 42"-wide fabrics.

## FABRIC REQUIREMENTS

Fabric <b>A</b>	F-12805	½ yd.
Fabric <b>B</b>	F-22804	FQ.
Fabric <b>C</b>	F-42800	FQ.
Fabric <b>D</b>	F-12804	½ yd.
Fabric <b>E</b>	F-12803	FQ.
Fabric <b>F</b>	FS-202	⅝ yd.
LINING FABRIC		
Fabric <b>F</b>	FS-202	⅝ yd. (Included)

## CUTTING DIRECTIONS

### Fabric A

- Cut 1 (one) 6½" x WOF strip.
  - Sub-cut 2 (two) 6½" squares.
  - Sub-cut 6 (six) 6½" x 4½" rectangles.
- Cut 1 (one) 4⅞" x WOF strip.
  - Sub-cut 1 (one) 4⅞" square.
  - Sub-cut 2 (two) 3½" x 11½" rectangles.

### Fabric B

(This cutting instruction is based on a 22" WOF)

- Cut 1 (one) 13½" x WOF strip.
  - Sub-cut 2 (two) 13½" x 2½" rectangles.
  - Sub-cut 2 (two) 11½" x 2½" rectangles.
  - Sub-cut 2 (two) 3½" x 4½" rectangles.

### Fabric C

(This cutting instruction is based on a 22" WOF)

- Cut 1 (one) 4½" x WOF strip.
  - Sub-cut 2 (two) 4½" squares.
- Cut 2 (two) 2" x WOF strips.
  - Sub-cut 2 (two) 2" x 19½" rectangles.

### Fabric D

- Cut 1 (one) 8½" x WOF strip.
  - Sub-cut 2 (two) 8½" x 3½" rectangles.
  - Sub-cut 1 (one) 4⅞" square.
  - Sub-cut 2 (two) 4½" squares.
  - Sub-cut 4 (four) 4½" x 3½" rectangles.
- Cut 1 (one) 2" x WOF strip.
  - Sub-cut 2 (two) 2" x 19½" rectangles.
- Cut 1 (one) 3" x WOF strip.
  - Sub-cut 2 (two) 3" x 20½" rectangles.

### Fabric E

(This cutting instruction is based on a 22" WOF)

- Cut 1 (one) 8½" x WOF strip.
  - Sub-cut 2 (two) 8½" x 2½" rectangles.
  - Sub-cut 2 (two) 4½" squares.
  - Sub-cut 2 (two) 4½" x 3½" rectangles.
- Cut 1 (one) 5½" x WOF strip.
  - Sub-cut 1 (one) 5½" x 9½" rectangle.

### Fabric F (Lining)

- Cut 2 (two) Bag Templates.

## CONSTRUCTION

Please ensure that all fabrics are ironed thoroughly before cutting them.  $\frac{1}{4}$ " seam allowances are included. WOF means width of the fabric.

### Half Square Triangle Assembly:

- Place 1 (one)  $4\frac{7}{8}$ " Fabric **A** square on 1 (one)  $4\frac{7}{8}$ " Fabric **D** square, right sides together.

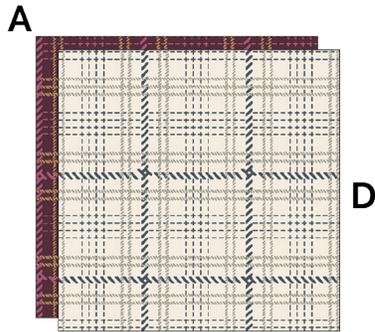


DIAGRAM 1

- Mark a diagonal line on the wrong side of the top fabric square.

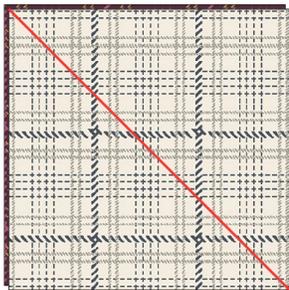


DIAGRAM 2

- Sew a scant  $\frac{1}{4}$ " seam on each side of the diagonal line.
- Press the sewn square to set the seams and, using a rotary cutter, cut through the drawn line.


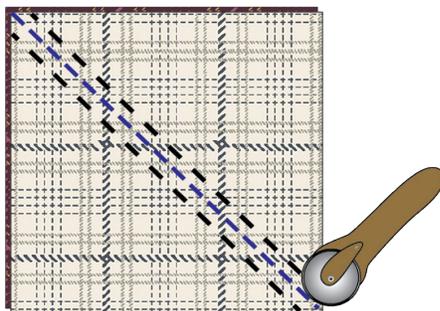


DIAGRAM 3

- Open each half square triangle (HST) outward and lightly press seams towards the darker color. Be careful to only press up and down, NOT back and forth, to not stretch them.
- Trim each HST to a  $4\frac{1}{2}$ " square.

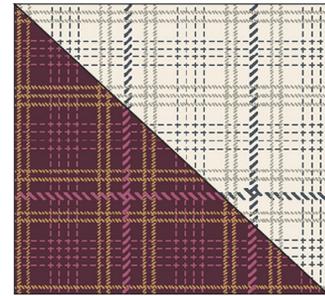

HST  
x2

DIAGRAM 4

### Unit Assembly:

- Sew together 1 (one)  $4\frac{1}{2}$ " x  $6\frac{1}{2}$ " Fabric **A** rectangle, 1 (one)  $4\frac{1}{2}$ " x  $3\frac{1}{2}$ " Fabric **D** rectangle, and 1 (one) of the HST units, as shown in the diagram below. Press.

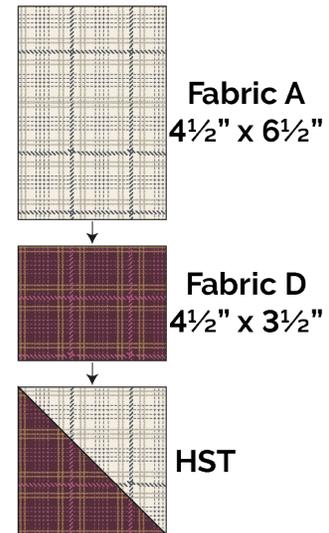


DIAGRAM 5




























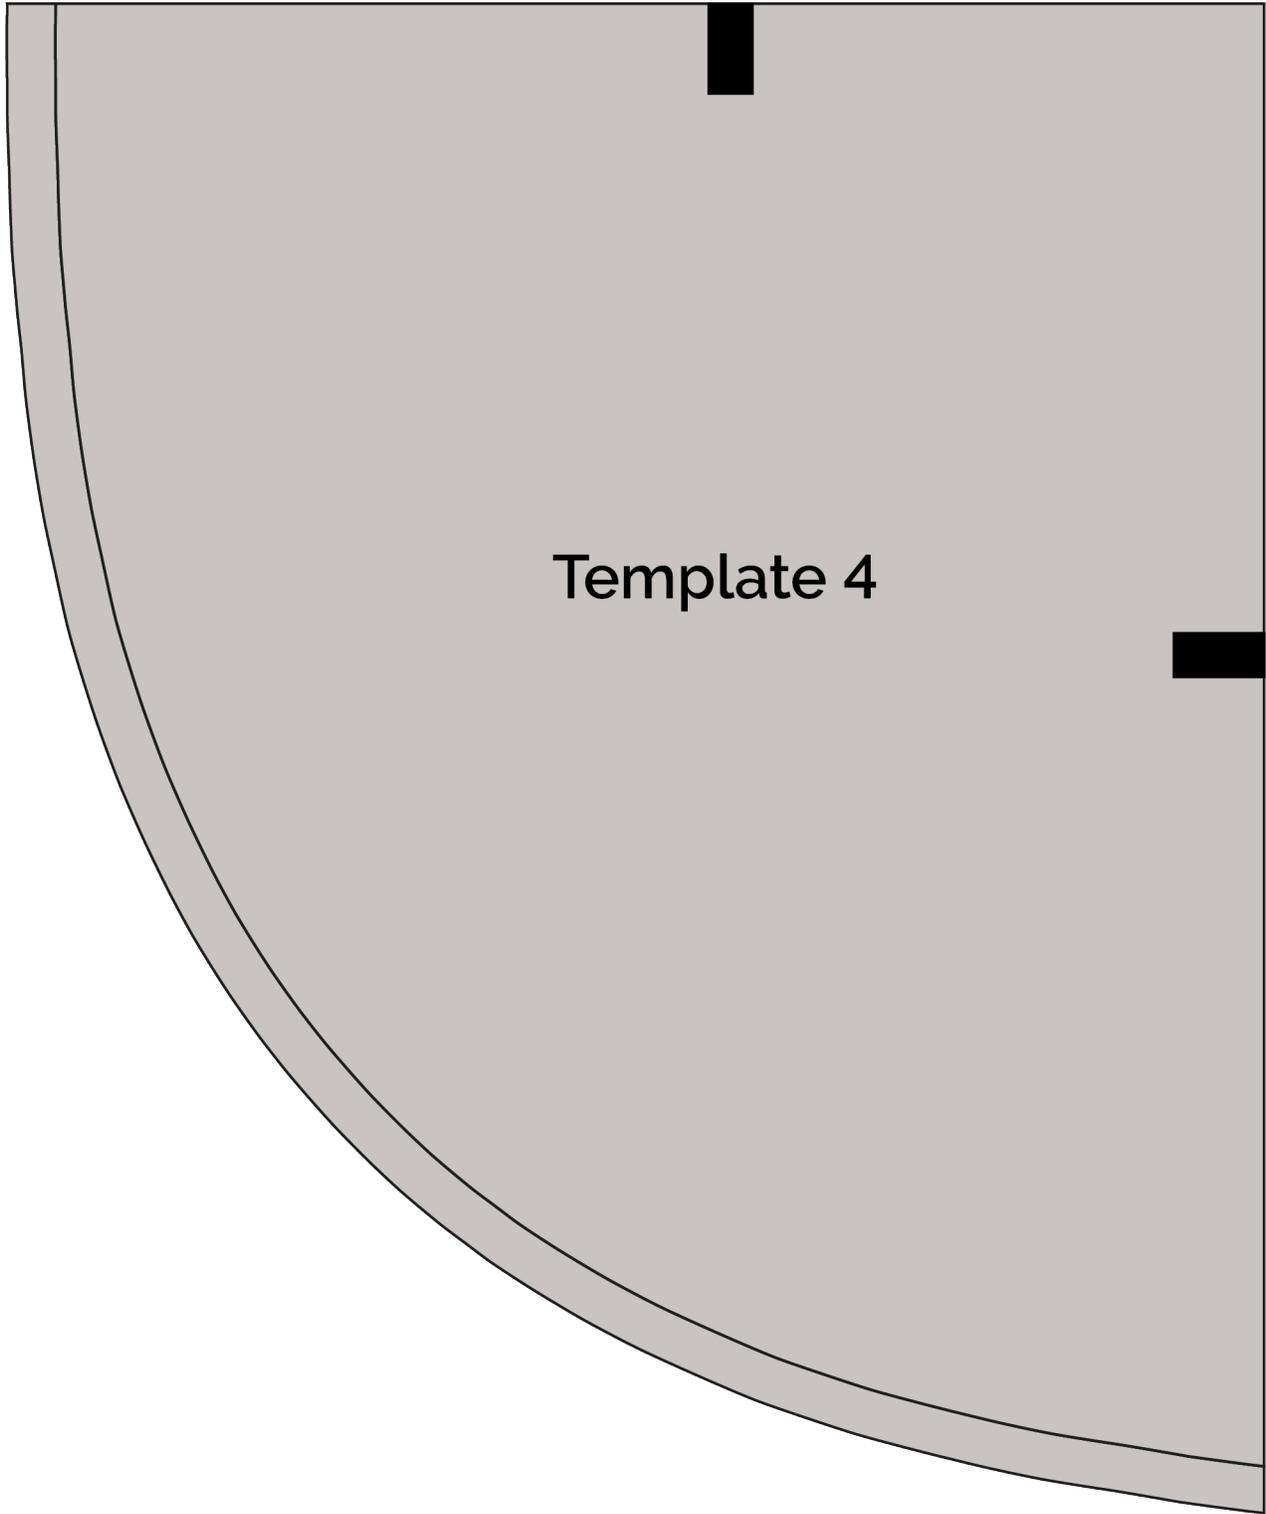

Template 4



