

Morning GLORY

BLOOMIN' AMERICANA EDITION


QUILT DESIGNED BY *AGFstudio*

Bloomin' **americana**

FABRICS DESIGNED BY AGF STUDIO




Fabric A
BAM-47104
LIBERTY GARDEN



Fabric B
BAM-47111
STARLIGHT



Fabric C
BAM-47100
FOURTH OF JULY




Fabric D
BAM-47109
TRUE SPIRIT




Fabric E
BAM-47112
BOOM & BLOOM




Fabric F
FE-514
SCARLET




Fabric G
BAM-47101
STARRY DREAMS RED



Fabric H
DSE-710
BLUE MINERALE



Fabric I
BAM-47105
FREE TO SPARKLE



Fabric J (Binding)
BAM-47107
STARS AND STRIPES



Backing
BAM-47102
HOME SWEET BLOOM





BLOOMIN' AMERICANA EDITION

FINISHED SIZE | 64½" x 64½"

FABRIC REQUIREMENTS

Fabric A	BAM-47104	⅝ yd.
Fabric B	BAM-47111	⅝ yd.
Fabric C	BAM-47100	⅝ yd.
Fabric D	BAM-47109	⅝ yd.
Fabric E	BAM-47112	⅝ yd.
Fabric F	FE-514	⅝ yd.
Fabric G	BAM-47101	⅝ yd.
Fabric H	DSE-710	⅝ yd.
Fabric I	BAM-47105	3 ½ yd.
Fabric J	BAM-47107	⅝ yd.

BINDING FABRIC

Fabric **J** BAM-47107 ⅝ yd. (Included)

BACKING FABRIC

BAM-47102 4 ⅛ yds. (Suggested)

CUTTING DIRECTIONS

Fabric A-H

- Cut 3 (three) 6" x WOF strips.
-Sub-cut 16 (sixteen) 6" squares.

Fabric I

- Cut 19 (nineteen) 6" x WOF strips.
- Sub-cut 128 (one hundred and twenty-eight) 6" squares.

Fabric J

- Cut seven (7) WOF x 2½" strips (Binding).

CONSTRUCTION

Please ensure that all fabrics are ironed thoroughly before cutting them. ¼" seam allowances are included. WOF means width of the fabric.

Magic Eight Assembly:

- Place 1 (one) 6" Fabric **I** square on 1 (one) 6" Fabric **A** square.
- Draw a line across both diagonals.

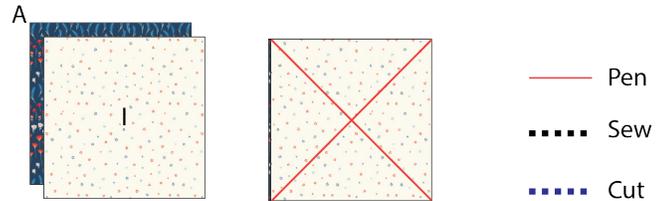


DIAGRAM 1

- Sew a *scant* ¼" seam on each side of both diagonal lines. Press the sewn square to set the seams.
- Using a rotary cutter, and without lifting your fabric, cut on both marked diagonal lines, and across the middle vertically and horizontally, as shown in the diagram below.

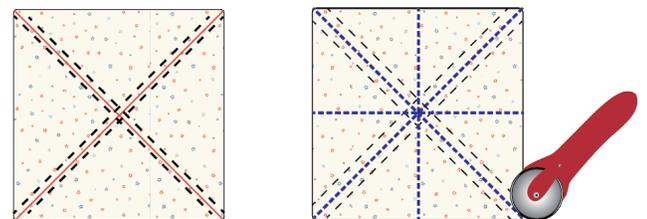


DIAGRAM 2

QUILT TOP

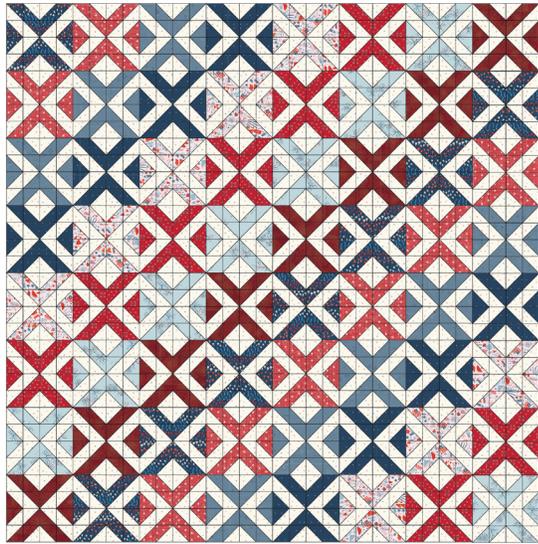


DIAGRAM 11

QUILT ASSEMBLY

Sew rights sides together.

- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.

BINDING

Sew rights sides together.

- Cut enough strips 2½" wide by the width of the fabric **J** to make a final strip 268" long. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5" tail. Sew with ¼" seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.

- Stop stitching ¼" before the edge of the quilt (DIAGRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of 45° and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at ¼" of the border, stitching all the layers. Do the same in the four corners of the quilt.
- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).
- Trim seam to ¼" and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.
- If you are using our 2.5 edition (binding fabric), click or scan this QR code to see a tutorial on how to use this specialty fabric.

