

SEW QUICK



PROJECT NAME: ARROW IPAD CASE

FINISHED SIZE: 10" x 14"

COLLECTION: LINEN BLEND SOLIDS




FABRIC A
DENL4012
RAINSHADOW

3/8 yd



FABRIC C
DENL4000
SOFT SAND

3/8 yd



FABRIC B
DENL4010
WILD CITRUS

1/4 yd

1/4" seam allowances are included.
WOF means width of fabric.

FABRIC A

- (2) 3 1/2" x 20 1/2" strips.
- (2) 3 1/2" x 14 1/2" strips.
- (34) 2 1/2" squares.

FABRIC B

- (17) 2 1/2" x 4 1/2" rectangles.

FABRIC C

- (1) 10 1/2" x 20 1/2" rectangle.
- (1) 10 1/2" x 14 1/2" rectangle.



ART GALLERY FABRICS®

CUTTING DIRECTIONS

Sew all rights sides together with 1/4" seam allowance.

Flying Geese Construction:

- Place one (1) 2 1/2" square from fabric **A** on the right edge of one (1) 2 1/2" x 4 1/2" rectangle from fabric **B**, mark a diagonal line and sew through the line, trim 1/4" away from the seam and press. (**Fig 1**). Place another 2 1/2" square from fabric **A** on the left edge of the same unit, and repeat the steps (**Fig 2**). Trim each unit to 2 1/2" x 4 1/2". Make a total of seventeen (17) **ABA** units.

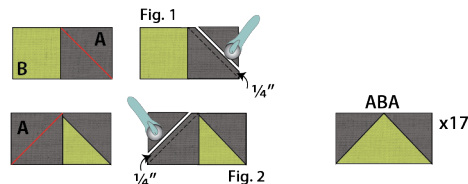


DIAGRAM 1

- **Block 1:** Join seven (7) **ABA** units in a column pointing down. Then sew one (1) 3 1/2" x 14 1/2" strip to each side.
- **Block 2:** Join ten (10) **ABA** units in a column pointing up, then sew one (1) 3 1/2" x 20 1/2" strip to each side. Quilt your blocks as desired.

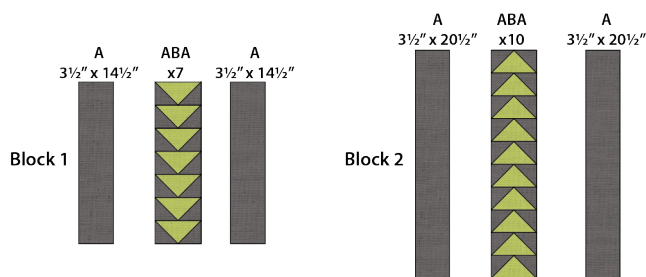


DIAGRAM 2

- Take the template and place it on the top edge of block 2. Trim the top corners following the curves of the template. (**Fig 1**). Place block 2 and block 1 right sides facing together and sew them on the sides and bottom. (**Fig 2**). Turn it right side out. Make the same steps with one (1) 10 1/2" x 20 1/2" and one (1) 10 1/2" x 14 1/2" rectangles from Fabric **C**, sew them together but this time leave a 4" opening. Leave this piece wrong sides out. (**Fig 3**).

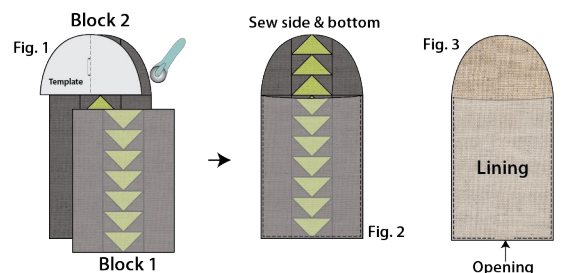


DIAGRAM 3

- Insert the main piece inside the lining. (**Fig 1**). Sew the two pieces together and turn it inside out by the opening left in lining and close that opening by hand. (**Fig 2**). Place two pieces of velcro on the top flap and the other one on the front of the case. (**Fig 3**).

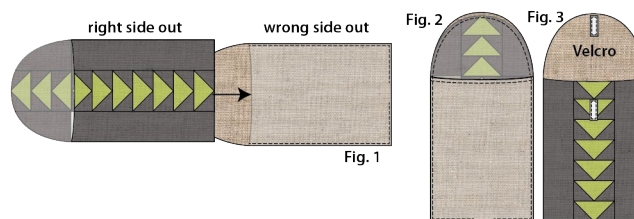


DIAGRAM 4

CONSTRUCTION

PROJECT INFO


FABRIC REQUIREMENTS

SEW QUICK

Printer Test



1" square

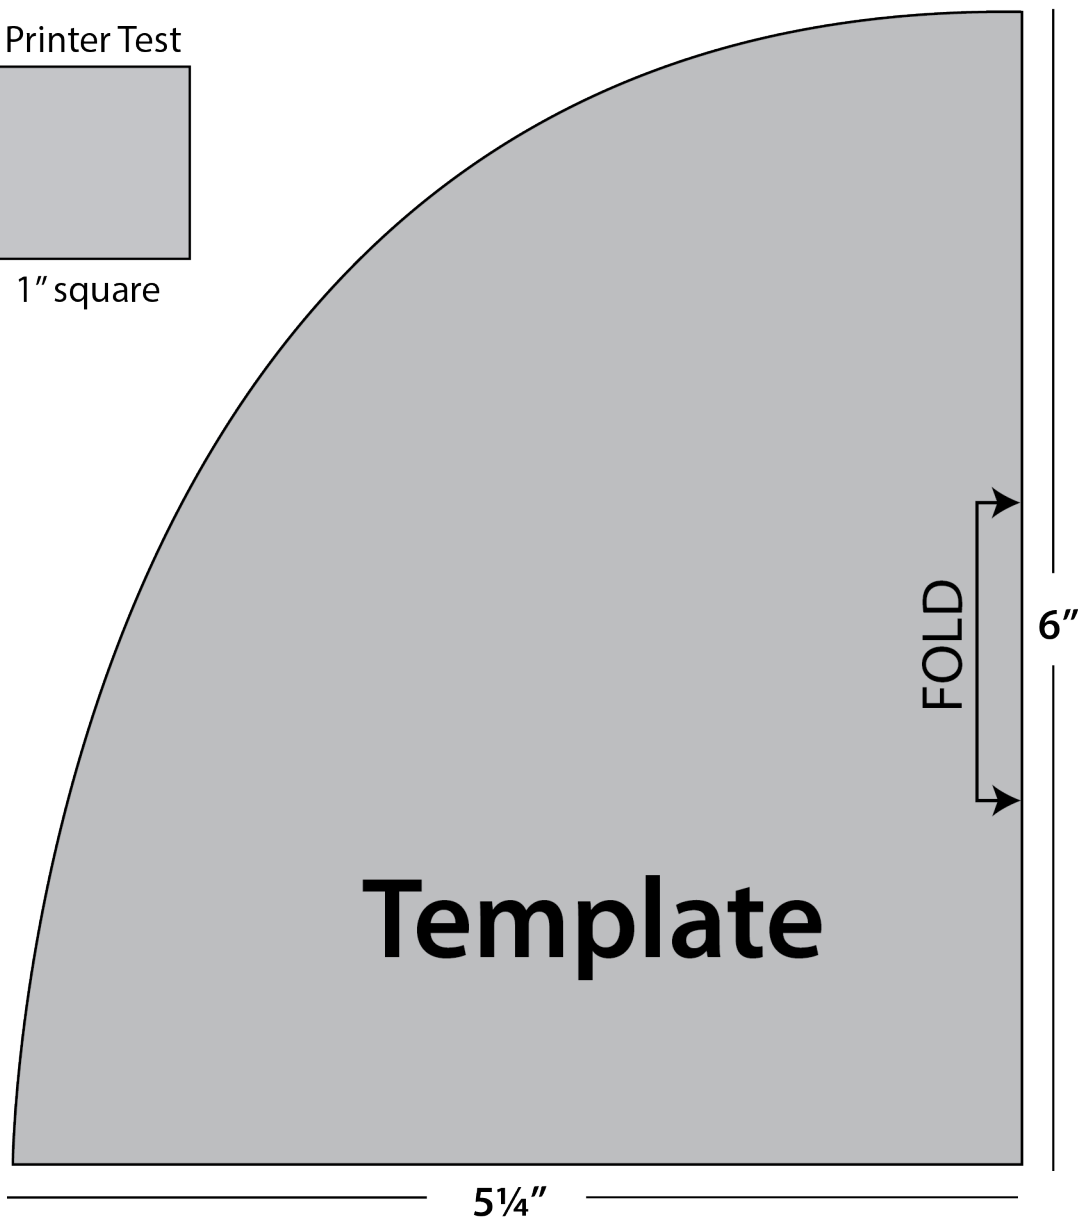

ART GALLERY FABRICS®