

SEW QUICK



PROJECT NAME: PRISM TABLE RUNNER

FINISHED SIZE: 12½" x 48½"

COLLECTION: LINEN BLEND SOLIDS

	FABRIC A DENL4008 SEDONA ¼ Yd		FABRIC D DENL4000 SOFT SAND ¼ Yd
	FABRIC B DENL4007 SANGRIA ¾ Yd		FABRIC E DENL4009 SNOW ¼ Yd
	FABRIC C DENL4012 RAINSHADOW ¼ Yd		FABRIC F DENL4004 ASHEN Backing ½ Yd

¼" seam allowances are included.
WOF means width of fabric.

FABRIC A:

- (4) 6½" squares.
- (4) 3½" squares.

FABRIC B:

- (4) 3½" squares.
- (3) 2½" x WOF strips (Binding).

FABRIC C:

- (4) 6½" squares.

FABRIC D:

- (4) 6½" squares.
- (8) 3½" squares.

FABRIC E:

- (4) 6½" squares.

CONSTRUCTION

Sew all right sides together with ¼" seam allowance.

Corner Triangle Assembly:

- Draw a diagonal line on the wrong side of 1 (one) Fabric **B** 3½" square, from corner to corner. (Fig 1). Place the marked Fabric **B** square on top of 1 (one) Fabric **A** 6½" square, Right Sides Together, aligning the outer edges as shown in the diagram. Stitch directly on the marked line. Trim the excess outer corner using a rotary cutter, leaving a ¼" seam allowance, and press the seam open. (Fig 2).
- Repeat this process to make a total of 4 (four) **AB** units. (Fig 3).

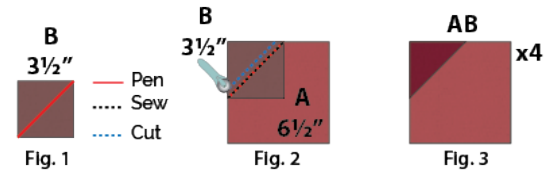


DIAGRAM 1

- Using the same corner-triangle technique, make 4 (four) units of each of the following combinations.



DIAGRAM 2

- Stitch the units together into 2 (two) rows of 2 (two) units each, taking care to rotate each unit and place it according to the diagram. Then, sew rows together. Press seams in alternating directions for flat, nested intersections.
- Make 2 (two) Block 1 and Block 2.

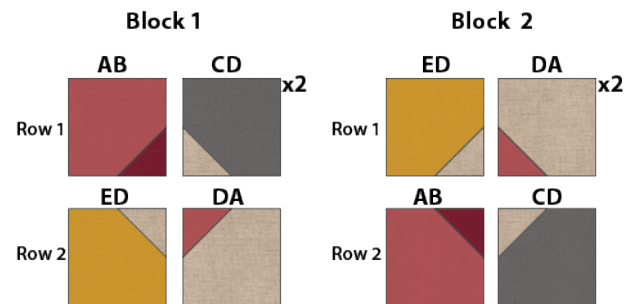


DIAGRAM 3

DIAGRAM 4

- Refer to the layout diagram for proper orientation and placement of each block.

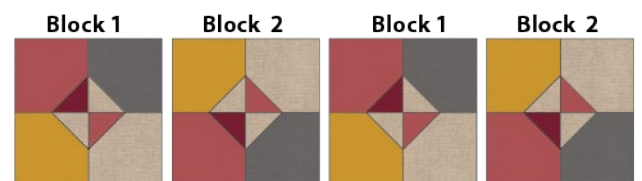


DIAGRAM 5